

H512 USB

VERSATILE PC/SC NFC DEVICE
READER/WRITER, CARD EMULATION, PEER-TO-PEER



PC/SC NFC DEVICE

The **H512 USB** connects to PC through a single USB link and 100% compliant with the PC/SC standard.

The **H512 USB** supports any T=CL contactless smartcard (ISO 14443) and is able to read/write any NFC Forum Tag.

EXCLUSIVE NFC FEATURES

Its NFC peer-to-peer capability (ISO 18092), either as Initiator or as Target, is the basis of innovative applications using this exciting new technology.

And, most important, the **H512 series** is the only group of products in its market that implements the card emulation mode into the device itself.

MADE FOR OEM

This is an OEM product, sold as electronic parts, without housing. This is a ready-to-use product with its own antenna. To address specific requirements, select the core module (H512S) and add a custom antenna.

SpringCard also designs ready-to-use products based on the H512 core. For any information, please contact us.

ABOUT SPRINGCARD


SpringCard products are designed and manufactured in France, and distributed worldwide.

With 12 years of expertise in smartcards, contactless, RFID and NFC, **SpringCard** is the ideal partner to make your project a success.

A FEW TYPICAL APPLICATIONS

Thanks to its small footprint, the **H512 series** is the ideal NFC peripheral to integrate into kiosks, vending machines, point-of-sales PC, card printers or issuing devices... It is perfectly adapted to :

- Event, gaming, ticketing,
- Active advertising,
- Loyalty, couponing,
- Peer-to-peer smartphone applications.

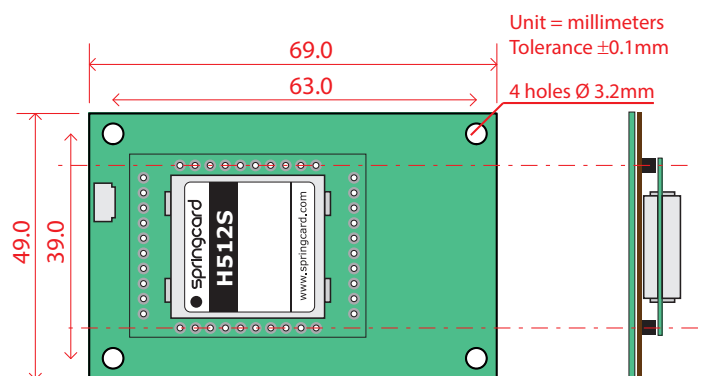

HEADQUARTERS, EUROPE SPRINGCARD

13 voie la Cardon
Parc Gutenberg
91120 Palaiseau
FRANCE

Phone : +33 (0) 164 53 20 10
sales@springcard.com

AMERICAS SPRINGCARD

6161 El Cajon Blvd
Suite B, PMB 437
San Diego, CA 92115
USA

Phone : +1 (713) 261 6746
sales-usa@springcard.com

www.springcard.com

A PRO ACTIVE BRAND

Pro Active

H512 USB

VERSATILE PC/SC NFC DEVICE

READER/WRITER, CARD EMULATION, PEER-TO-PEER



TECHNICAL SPECIFICATIONS

Contactless smartcard interface


Standards	ISO/IEC 14443 A and B ISO/IEC 18092 Initiator and Target (passive) T=CL and NFC-DEP protocols on-board
RFID carrier	13.56 MHz
Operating distance	Typical 5 cm - up to 10cm Vary with antenna, environment and card
Card baud rate	106, 212, 424 or 848 kbps
NFC Forum Tag read/write	<ul style="list-style-type: none"> ▪ Type 1 : Innovision Jewel/Topaz ▪ Type 2 : NXP Mifare UltraLight, NTAG203... ▪ Type 3 : Sony Felica Lite ▪ Type 4 : any T=CL smartcard
Supported contactless smartcards (partial list)	<ul style="list-style-type: none"> ▪ NXP Mifare Classic, Mifare Plus, Desfire, SmartMX... ▪ Calypso (including Innovatron radio protocol) ▪ Any NFC object or mobile phone running in card emulation mode
Card emulation mode	<ul style="list-style-type: none"> ▪ On-board emulation of NFC Forum type 2 Tag and type 4 Tag, 1024kB available for NDEF data ▪ Host-based emulation mode, with T=CL protocol emulated on-board

Environment and safety

Operating temperature	- 20 → + 70°C
Storage temperature	- 40 → + 85°C
MTBF	500 000 hours
CE mark	EN50082 / EN55022 class B
Other standards	RoHS, FCC part 15 pending

PINOUT

Please refer to document PNA2237 « H512s HARDWARE INTEGRATION GUIDE » for reference and details.

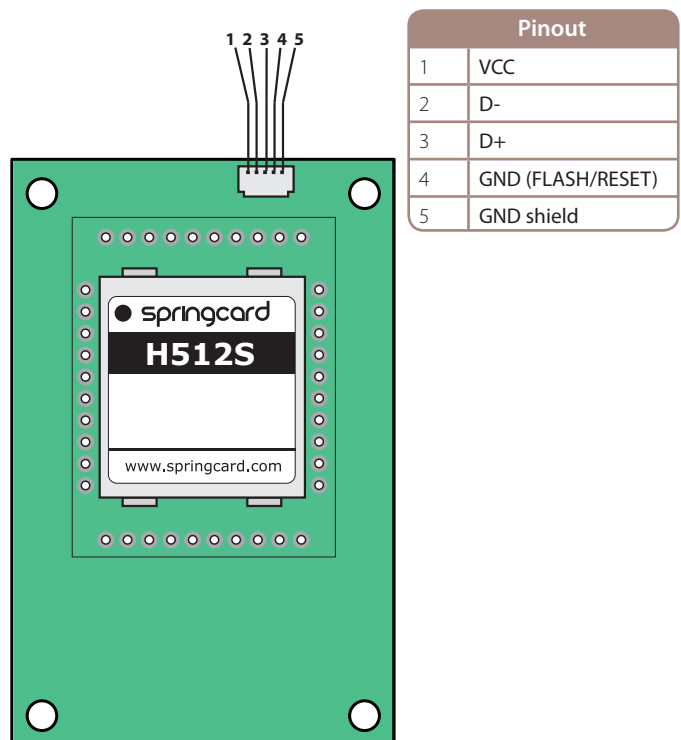

ORDER CODES

PART #	Description
H512USB	Ready-to-use H512 mounted on 65x45 antenna
CMP3062	1.5m USB cable for H663USB

Information in this document is subject to change without notice.

Copyright © PRO ACTIVE SAS 2010-2012, all rights reserved.
Reproduction without written permission of PRO ACTIVE is forbidden.
SPRINGCARD, PRO ACTIVE, and both logos are registered trademarks of PRO ACTIVE SAS.
All other trademarks are property of their respective owners.

PRO ACTIVE company with a capital of 227 000 €
R.C.S. EVRY B 429 665 482
N.A.F. 722 C
VAT # : FR 27 429 665 482
France

PRECAUTIONS FOR INSTALLATION

Those devices use inductive coupling (magnetic field) to power the cards and communicate with them. Precaution must be taken to keep them far from any source of perturbation (eg. other readers, computers...). Installing the device near a metal surface will decrease the operating distance and increase power consumption. Please contact us if you need any assistance to integrate those devices.

The modules need an external antenna to operate. The antenna must be designed carefully, depending on your own specifications (size constraints, expected operating distance) but with limited flexibility due to the requirements of the ISO standards and the EMC regulations. SpringCard has a long experience designing antenna. Please contact us if you need a custom design.

www.springcard.com

A PRO ACTIVE BRAND

**PRO
Active**