

springcard[®]

Prox'N'Roll RFID Scanner HSP

Key points

Neither a driver nor a specific software is required: the Prox'N'Roll RFID Scanner HSP's USB interface emulates a standard keyboard. Data from the RFID or NFC tag are entered as keystrokes.

STANDALONE AND SIMPLE

Prox'N'Roll RFID Scanner HSP is highly configurable and could read the serial number or virtually any data from any RFID / NFC tag or contactless smartcards in the 13.56Mhz range.

Data are transmitted to the computer as if they were entered on the keyboard. Using a RFID chip becomes as easy as using a barcode.

Thanks to Prox'N'Roll RFID Scanner HSP, you don't need to develop a PC software to collect RFID data or extract information from a contactless smartcard: the reader runs on its own without any external software. And it works with any desktop operating system (Windows, Mac OS, Android, Linux...).

All this is made possible thanks to the **keyboard emulation mode**, compliant with **USB HID specification**.

Prox'N'Roll RFID Scanner HSP is:


- Easily configured on the field through a secure master card or Multiconf software (Windows),
- Able to run 4 recognition templates simultaneously, so one may use 4 different tags families with the same reader.

TYPICAL APPLICATIONS

- Loyalty programs
- Logistics, library
- Storage, stocktaking, order preparation
- Product traceability



1

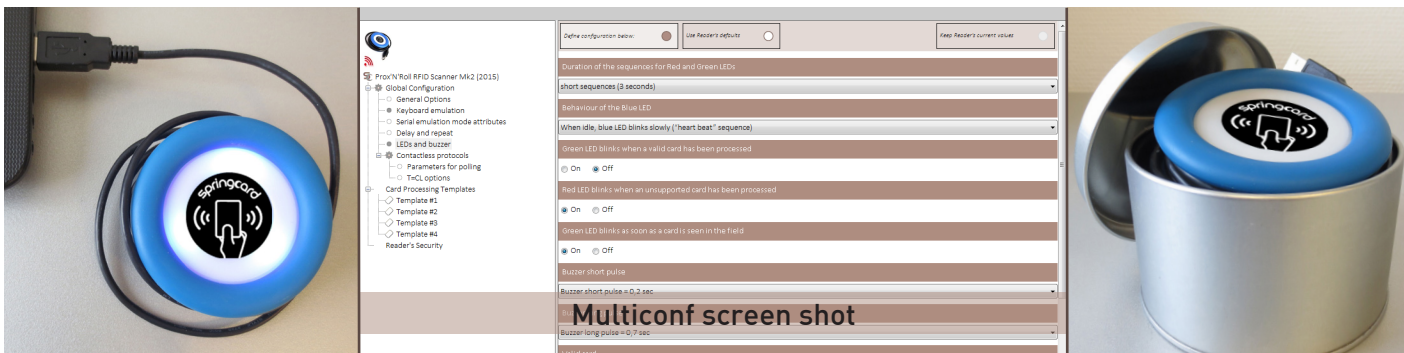


Versions and order codes

- SC2219: Prox'N'Roll RFID Scanner HSP
Qwerty keyboard layout
- SC14168: Prox'N'Roll RFID Scanner HSP
Azerty keyboard layout
- SC14268: Prox'N'Roll RFID Scanner HSP
Qwertz keyboard layout

Technical data

Prox'N'Roll RFID Scanner HSP



RFID/NFC Standards	ISO 14443 A-B, ISO 15693, NFC peer-to-peer (ISO 18092 initiator, passive communication mode) - T=CL protocol on-board
Carrier frequency	13.56MHz (RFID HF, NFC)
RF field level	Typ.: 2.5A/m at 0cm, 1.5A/m at 1.5cm
Operating distance	Typ.: 0-5cm, up to 7.5cm
Card/tag baudrate	26kbps (ISO 15693), 106kbps (ISO 14443), 212/424kbps (ISO 18092)
Antenna	Integrated, Ø5.5cm, balanced
Communication with host	USB 2.0 full speed (1.1 compliant) 12Mbps - powered by the host (< 400mA @ 5V)
Standards	USB HID (QWERTY/AZERTY/QWERTZ layout)*
In-field firmware upgrade	Yes (USB / DFU using SpringCard FUU software)
Visual - sound	3 LEDs (RGB) - single tone beeper
Power	Powered by the USB bus (5V DC)
Size (DxH) - weight	Ø8.1cmx3.5cm - ca 113g
Cable / connector	1.8m / USB type A
Environment	
Temperature	Operating: -20°C – +70°C / Storage: -40°C – +85°C
Humidity	0 – 90% (non condensing)
MTBF	500 000 hours
Approvals	Radio : EN 300 330 – EMC : EN 301 489 – Sécurité : EN 60 950-1 CE mark – FCC class B part 15 (pending/on request)
Environmental approvals	RoHS, WEEE
Warranty	2 years

* This is the factory configuration. It can be changed on the field afterwards.

For any questions or further information please contact us info@springcard.com

YOUR EXPERT IN CONTACTLESS SOLUTIONS

SpringCard offers a wide range of products to meet as many needs and use cases as possible.

With a 15-year experience in contactless smartcards, communication technologies and development on embedded or mobile systems, SpringCard R&D Team is also a valuable partner to design your own solution or product.

SpringCard in the world

Angers - Paris - Strasbourg
San Diego - San Francisco - Sydney - Tokyo



www.springcard.com

SpringCard and the SpringCard logo are registered trademarks of SPRINGCARD SAS.

MIFARE, MIFARE Classic, MIFARE DESFire, MIFARE Plus, MIFARE UltraLight, ICODE, SmartMX, NTAG are registered trademarks of NXP B.V. and are used under license. FelICa is a registered trademark of Sony Corporation. Tag-it is a trademark of Texas Instruments. The N Mark is a registered trademark of NFC Forum, Inc. Bluetooth is a registered trademark of Bluetooth SIG, Inc. Some icons made by Freepik, Elegant Themes, Sarfraz Shoukat, Picol, Situ Herrera, Icomoon, Icons8, OCHA from www.flaticon.com

We reserve the right to change specifications, product descriptions, or to stop manufacturing a product, at any time and without prior written or oral notice.
Non-contractual pictures and drawings.

SPRINGCARD SAS au capital de 227 000 € (FRANCE) - RCS EVRY B 429 665 482 - NAF 722 C - VAT #: FR 27 429 665 482
Copyright © SPRINGCARD SAS 2016, tous droits réservés.



Products designed and manufactured in France

