

TIPRO CRAZY WRITER

OEM CONTACTLESS SMARTCARD READER + 3 μ SIM/SAM

SpringCard TiproCrazyWriter is a versatile ISO 14443 (A&B) and Mifare contactless reader/writer. Its three integrated μ SIM/SAM couplers are ready to receive any SAM smartcard for advanced security.

KEY FEATURES

With a compact design and single bus-powered USB interface, TiproCrazyWriter has been specially designed to be integrated in a Tipro keyboard (see hardware specifications for reference). But it also fits easily into card printers, vending or ticketing machines, fare gates or validators in transportation networks, and more.

PC/SC SMARTCARD READERS

SpringCard TiproCrazyWriter is PC/SC compliant, and it brings immediate contactless card support to existing PC/SC applications (the whole product is seen as 4 PC/SC readers : 1 contactless, and 3 SIM/SAM).

On the other hand, TiproCrazyWriter may be configured for legacy, and is in this case 100% compatible with earlier products from SpringCard (CSB4, K531...).

A FEW TYPICAL APPLICATIONS

- Card pre-personalization and personalization
- Vending or ticketing machines.


SPRINGCARD & PRO ACTIVE

Established in 2000, Pro Active is an innovative provider of smartcard-related solutions, and one of the leaders in the contactless-reader market.

SpringCard distributes Pro Active's contact and contactless products worldwide, under a single brand name.

MECHANICAL SPECIFICATIONS


Motherboard

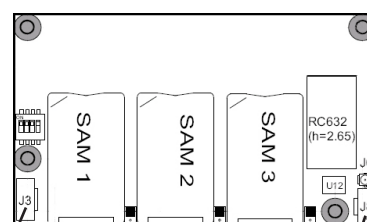

USB cable

antenna cable

Antenna board

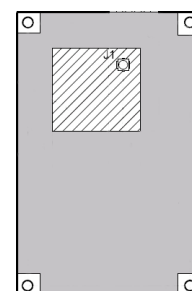

CAUTION

This device is a contactless reader; it uses inductive coupling (magnetic field) to power the cards and communicate with them. Precaution must be taken to keep the reader far from any source of perturbation (e.g. other readers, computers, GSM mobile phones...). Installing the reader near a metal surface (aluminium or steel plate...) will lead to shorter operating distance and increased power consumption.

SpringCard has a long experience installing contactless couplers in various kinds of device. Do not hesitate to contact us if you need any assistance.

RFID AND HEALTH

For your information, French work and environmental standards agency (AFSSET) has published in January 2009 a report on the impacts of Radio Frequency Identification on environment and human body.

Visit [here](#) if you want to learn more about this report (French version).

HEADQUARTERS, EUROPE SPRINGCARD

13 voie la Cardon
Parc Gutenberg
91120 Palaiseau
FRANCE

Phone : +33 (0) 164 53 20 10
Fax : +33 (0) 164 53 20 18

AMERICAS SPRINGCARD

964 Fifth Avenue
Suite 235
San Diego, CA 92101
USA

Phone : +1 (619) 544 1450
Fax : +1 (619) 573 6867

www.springcard.com

A PRO ACTIVE BRAND
Pro Active

TIPRO CRAZY WRITER

OEM CONTACTLESS SMARTCARD READER + 3 µSIM/SAM

TECHNICAL SPECIFICATIONS

Contactless smartcard interface	
Standards	ISO/IEC 14443 A and B, T=CL ISO/IEC 15693 and 18000-3
RFID carrier	13.56 MHz
Operating distance	up to 8 cm depending on card and on environment
Card baud rate	106, 212, 424 or 848 kbit/s
Supported cards (partial list) : <ul style="list-style-type: none"> NXP (Philips) ICODE1, ICODE-SLI, etc Texas Instrument TagIT NXP (Philips) MIFARE Classic & UltraLight NXP (Philips) DESFIRE, SmartMX, ProX Infineon SLE66 family ST MicroElectronics SR, SRI, SRIX families HID iClass, Inside PicoTag ASK CTS256/CTS512 Calypso (CD97, CD21, GTML, etc)¹ And virtually any ISO/IEC 14443 A or B compliant smartcard, or ISO/IEC 15693 compliant RFID label	

¹ Calypso card operation is subject to an extra license fee. Contact us for information.

SIM / SAM interfaces	
Card format	ID-000 (µSIM)
Number of slots	3
Standards	ISO/IEC 7816, T=0 & T=1
Smartcard class	A and B (5V or 3.3V cards)
Clock frequency	3,6864 MHz
Card baud rate	Up to 115200 bps

USB interface	
Standard	USB 2.0 (12Mbps) - also supports 1.1
Power supply	Bus powered (≈300mA under 5V)
Default configuration is PC/SC	

PC /CS mode	
Standard USB CCID profile	
Windows driver	2000/XP/Vista
Linux and others	Supported by pcsc-lite CCID driver
API and SDK	Full PS/SC - Free SDK available

Legacy mode	
USB virtual serial comm. port API compliant with existing products (SpringProx-CF, CSB4, CSB5, K531,...)	
Drivers	Windows, Linux, ...
API and SDK	SpringProxAPI SDK available for free

Hardware specifications	
N.B. : This is an OEM product, sold as electronic parts, without housing	
Motherboard dimensions (LxWxH)	80 x 48 x 1.6 mm
Antenna board dimensions (LxWxH)	69 x 45 x 1.6 mm
Distance antenna to mother board	2-wire twisted cable = 5 cm 50 Ω coaxial cable = 2 m
Tipro keyboard reference	Model TMC-KMCV-C15-062 (<i>not provided</i>)

Environment and safety	
Operating temperature	0 → +70°C
Storage temperature	-40 → +85°C
Durability	10 000 SIM/SAM insertions
MTBF	500 000 hours
CE mark	EN50082 / EN55022 class B
Other standards	RoHS, FCC pending

ORDER CODES

PART #	Description
TCW	TiproCrazyWriter

Information in this document is subject to change without notice.

Copyright © PRO ACTIVE SAS 2008, all rights reserved.
Reproduction without written permission of PRO ACTIVE is forbidden.
SPRINGCARD, PRO ACTIVE, and both logos are registered trademarks of PRO ACTIVE SAS.
All other trademarks are property of their respective owners.

PRO ACTIVE company with a capital of 227 000 €
R.C.S. EVRY B 429 665 482
N.A.F. 722 C
VAT # : FR 27 429 665 482
France

www.springcard.com

A PRO ACTIVE BRAND
Pro Active