

PROX'N'DRIVE LOW POWER CONTACTLESS COUPLER



CONTACTLESS READER/WRITER

Prox'N'Drive is an ISO 14443 (A,B & B') and Mifare contactless reader/writer.

Featuring an innovative low power card detection system and designed to be installed behind a windscreen or a window, it is the ideal coupler for car-sharing applications.

KEY FEATURES

Being both compact and flexible, Prox'N'Drive is ideal for in-vehicle application. A single cable conveys both single 12V DC power and the RS-232 interface.

The front panel shows 3 high-luminosity LEDs for user information.

The low power card detection system make it possible to put both the reader and its host system in deep standby mode until a contactless card, RFID tag or NFC object is waved over the antenna. The reader is customizable with your logo.



A FEW TYPICAL APPLICATIONS

- Car-sharing,
- Battery-powered kiosks,
- Active display windows.

ABOUT SPRINGCARD

SpringCard products are designed and manufactured in France, and distributed worldwide.

With 12 years of expertise in smartcards, contactless, RFID and NFC, SpringCard is the ideal partner to make your project a success

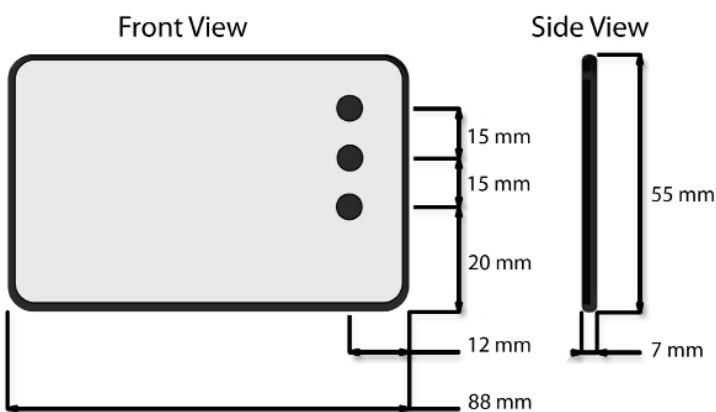

PIN Assignments	
1	HOST_WAKEUP
2	\RESET
3	\FLASH
4	GND
5	RFU
6	PWR
7	RS232 OUT
8	RS232 IN
9	GND
10	RFU

HEADQUARTERS, EUROPE SPRINGCARD

13 voie la Cardon
Parc Gutenberg
91120 Palaiseau
FRANCE

Phone : +33 (0) 164 53 20 10
sales@springcard.com


AMERICAS SPRINGCARD

6161 El Cajon Blvd
Suite B, PMB
San Diego, CA 92115
USA

Phone : +1 (619) 544 1450
sales-usa@springcard.com

www.springcard.com

PROX'N'DRIVE LOW POWER CONTACTLESS COUPLER

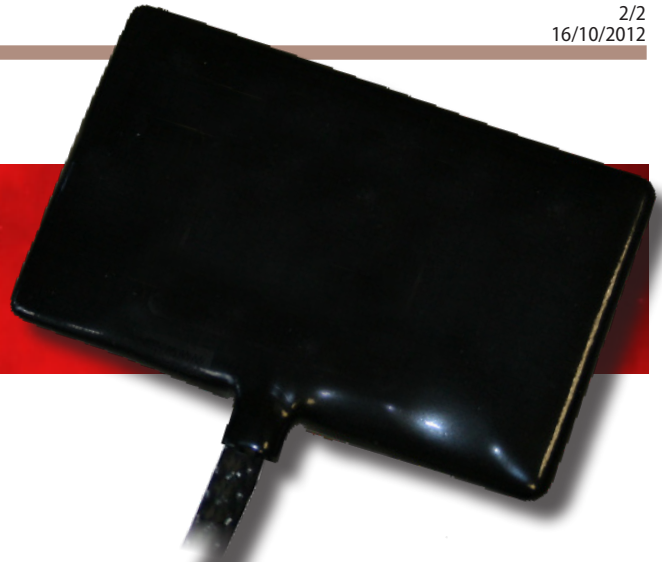

TECHNICAL SPECIFICATIONS

Contactless smartcard interface

Standards	ISO/IEC 14443 A, B and B'
RFID carrier	13.56 MHz
Operating distance	Up to 8 cm depending on card and on environment
Card baud rate	106 kbps
Supported contactless smartcards (partial list)	<ul style="list-style-type: none"> ▪ NXP (Philips) MIFARE Classic & UltraLight ▪ NXP (Philips) DESFIRE, SmartMX, ProX ▪ Calypso (CD97, CD21, GTML, etc) And virtually any ISO/IEC 14443 A or B compliant smartcard

Environment and safety

Operating temperature	- 20 → + 70°C
Storage temperature	- 40 → + 85°C
MTBF	500 000 hours
CE mark	EN50082 / EN55022 class B
Other standards	RoHS, FCC pending

Power supply

3,3V to 24V DC

		3,3V	5V	12V	24V
Consumption	Standby	1545µA	970µA	530µA	305µA
	Typical	105µA	75mA	50mA	35mA
	Maximum	210 µA	145mA	70mA	50mA

Serial Interface

Connector	RS-232
Input voltage	3,3V to 24V DC
Baud rate	38400 or 115200 bps

Software

API and SDK	SpringProx API - Free SDK available API compliant with existing products (CSB4, K531, K632, K663...)
-------------	---

Hardware specifications

Dimensions (LxWxH)	88 x 55 x 7 mm
Housing material	ABS - 94VO
Weight	75 g
Cable	100 cm
Connector	Molex 43025-1000



Self Adhesive foam

color	black
width	0.9mm
temperature	-40°C → +120°C
Resistant to : water, alcool, detergent	

ORDER CODES

PART #	Description
EX2063	Prox'N'Drive

PRECAUTIONS FOR INSTALLATION

This device is a contactless reader; it uses inductive coupling (magnetic field) to power the cards and communicate with them. Precaution must be taken to keep the reader far from any source of perturbation (e.g. other readers, computers...). Installing the reader near a metal surface (aluminium or steel plate...) will lead to shorter operating distance and increased power consumption.

SpringCard has a long experience installing contactless couplers in various kind of devices. Do not hesitate to contact us if you need any assistance.

Information in this document is subject to change without notice.

Copyright © PRO ACTIVE SAS 2008-2013, all rights reserved.
 Reproduction without written permission of PRO ACTIVE is forbidden.
 SPRINGCARD, PRO ACTIVE, and both logos are registered trademarks of PRO ACTIVE SAS.
 All other trademarks are property of their respective owners.

PRO ACTIVE company with a capital of 227 000 €
 R.C.S. EVRY B 429 665 482
 N.A.F. 722 C
 VAT # : FR 27 429 665 482
 France

www.springcard.com

A PRO ACTIVE BRAND