


The Springcard logo features the word "spring" in red and "card" in grey, with a registered trademark symbol (®) to the upper right.

# Prox'N' Drive

Power-effective RFID HF/ NFC coupler for automotive applications

PFL2064-AH / 08 2018

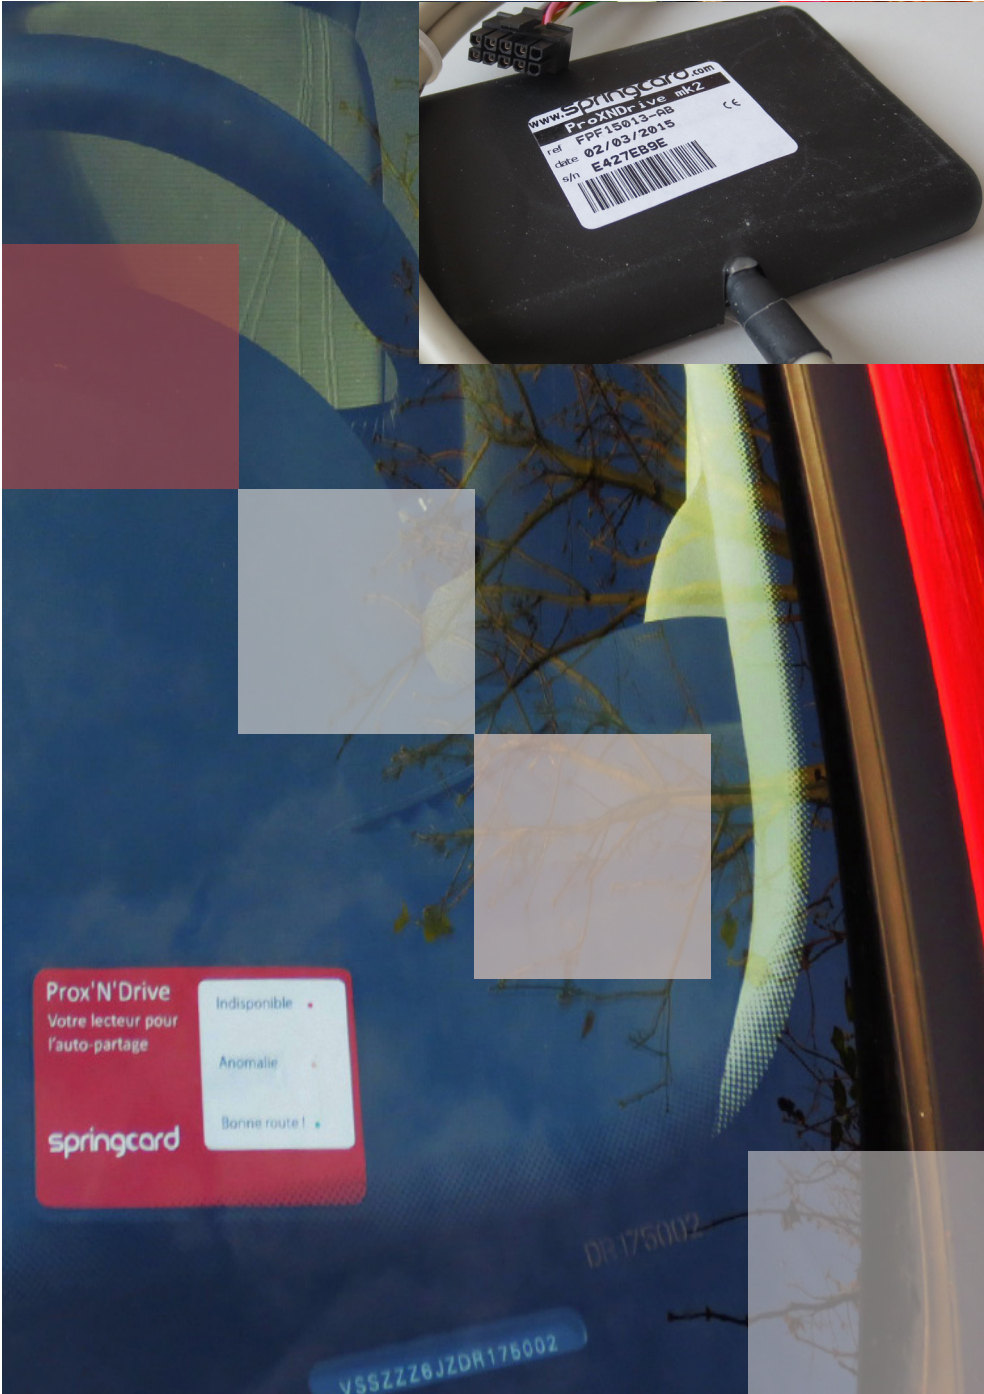

# Prox'N'Drive

## Contactless RFID/NFC coupler for automotive

Being both compact and flexible, Prox'N'Drive is ideal for in-vehicle mounting. A single cable conveys both single 12V DC power and the RS-232 interface.

The front panel has 3 high-luminosity LEDs for user information and is customizable with any personal logo.

The innovative low power card detection system makes it possible to put both the reader and its host system in a deep standby mode until a contactless card, RFID tag or any NFC object is put over the antenna.

1

### TYPICAL APPLICATIONS

- Car-sharing
- Battery-powered fleets
- Active display windows

### KEY FEATURES

- Reads cards and tags through windscreen and windows
- Single cable and connector for both power and serial interface (RS-232)
- Low Power Card Detection
- Self-adhesive device made for automotive environments



# Technical data

<b>Prox'N'Drive</b>																					
<b>RFID/NFC Standards</b>	ISO 14443 A-B, ISO 15693, NFC peer-to-peer (ISO 18092 initiator, passive communication mode), ISO 21481																				
Carrier frequency	13.56MHz (RFID HF, NFC)																				
RF field level	Typ.: 2A/m																				
Operating distance	Typ.: 8 cm (depends on card/tag)																				
Card/tag baudrate	106 kbps																				
<b>Communication with host</b>	Serial interface RS-232																				
Interface	Serial - 38400 or 115200bps SpringProx binary or ASCII protocol																				
SDK	Free SDK featuring 'SpringProx API' (full ANSI C source code + binary for Windows and Linux)																				
In-field firmware upgrade	No physical action on the device using SpringCard FUU application (provided that the RESET pin is controlled by the host)																				
<b>Visual</b>	3 LEDs (RYG)																				
<b>Power</b>	3.3V to 24V DC																				
	<table border="1"> <thead> <tr> <th>Consumption</th> <th>3.3V</th> <th>5V</th> <th>12V</th> <th>24V</th> </tr> </thead> <tbody> <tr> <td>Standby</td> <td>&lt;1800µA</td> <td>&lt;1000µA</td> <td>&lt;600µA</td> <td>&lt;400µA</td> </tr> <tr> <td>Typical</td> <td>105mA</td> <td>75mA</td> <td>50mA</td> <td>35mA</td> </tr> <tr> <td>Maximum</td> <td>210mA</td> <td>145mA</td> <td>70mA</td> <td>50mA</td> </tr> </tbody> </table>	Consumption	3.3V	5V	12V	24V	Standby	<1800µA	<1000µA	<600µA	<400µA	Typical	105mA	75mA	50mA	35mA	Maximum	210mA	145mA	70mA	50mA
	Consumption	3.3V	5V	12V	24V																
	Standby	<1800µA	<1000µA	<600µA	<400µA																
	Typical	105mA	75mA	50mA	35mA																
Maximum	210mA	145mA	70mA	50mA																	
<b>Size (LxWxH) - weight</b>	88 x 55 x 7 mm - ca 75 g																				
<b>Cable / connector</b>	1m / Molex 43025-1000																				
Temperature	Operating: -20°C – +70°C / Storage: -40°C – +85°C																				
Humidity	0 – 90% (non condensing)																				
MTBF	500 000 hours																				
<b>Approvals</b>	EN50082, EN55022 class B																				
<b>Environmental approvals</b>	RoHS, WEEE																				
<b>Warranty</b>	2 years																				

# Springcard

SpringCard offers a wide range of products to answer the largest possible amount of needs and uses. With 18 years of experience in contactless smartcards, communication technologies and the development of mobile and embedded systems, R&D SpringCard's team is a valued partner to help you create your own solution or product.

## Our locations

Angers - Paris  
San Diego - San Francisco - Sydney



[www.springcard.com](http://www.springcard.com)