

## H663 SERIES

PC/SC RFID AND NFC READERS WITH 1 TO 5 OPTIONAL  
T=0/T=1 INTERFACES FOR CONTACT SMARTCARDS OR SIM/SAM



### CONTACTLESS & RFID

The **H663 series** supports any T=CL contactless smartcard (ISO 14443), including Calypso transport cards and all families of Mifare cards.

It is able to read/write any NFC Forum Tag as well as virtually any RFID chip in the ISO 15693 or ISO 18000-3 mode 1 standards (ICODE-SLI, TagIt, my-d...).

### INNOVATING NFC FEATURES

Its NFC peer-to-peer capability (NFCIP1 - ISO 18092) is the basis of innovative new applications using this exciting new technology.

### CONTACT SMARTCARD AND SIM/SAM

The **H663 series** is able to drive one T=0 or T=1 smartcard or SIM/SAM without external component. Thanks to an optional expansion interface, its number of slots goes up to 5.

Combining a small footprint and the support of SAM in a single device, the **H663 series** is the ideal coupler family for any application where speed and security of the transactions are key concerns.

### MADE FOR OEM

This is an OEM products family, sold as electronic parts, without housing. There is a ready-to-use product with its own antenna (H663-USB). To address specific requirements, select the core module (H663S or H663A) and add a custom antenna.

SpringCard also designs ready-to-use products based on the H663 core. For any information, please contact us.

### A FEW TYPICAL APPLICATIONS


The **H663 series** has an improved operating range and a fastest communication speed.

- Transport terminals,
- Vending machines, point-of-sales PC,
- Card printers,
- Issuing devices,
- And more...

### ABOUT SPRINGCARD

SpringCard products are designed and manufactured in France, and distributed worldwide.

With 12 years of expertise in smartcards, contactless, RFID and NFC, SpringCard is the ideal partner to make your project a success.

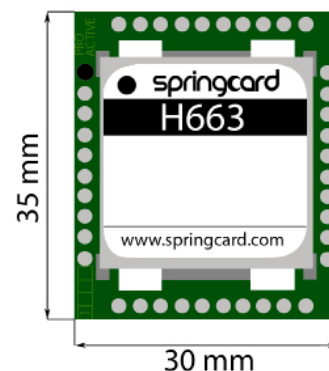

#### HEADQUARTERS, EUROPE SPRINGCARD

13 voie la Cardon  
Parc Gutenberg  
91120 Palaiseau  
FRANCE

Phone : +33 (0) 164 53 20 10  
sales@springcard.com

#### AMERICAS SPRINGCARD

6161 El Cajon Blvd  
Suite B, PMB 437  
San Diego, CA 92115  
USA

Phone : +1 (713) 261 6746  
sales-usa@springcard.com

[www.springcard.com](http://www.springcard.com)

A PRO ACTIVE BRAND

**Pro  
Active**

## H663 SERIES

PC/SC RFID AND NFC READERS WITH 1 TO 5 OPTIONAL  
T=0/T=1 INTERFACES FOR CONTACT SMARTCARDS OR SIM/SAM



### TECHNICAL SPECIFICATIONS

Contactless / NFC interface	
Standards	ISO/IEC 14443 A and B ISO/IEC 18092 Initiator (passive mode) T=CL and NFC-DEP protocols on board ISO/IEC 15693
RFID carrier	13.56 MHz
Operating distance	Typical 5 cm - up to 10cm Vary with antenna, environment and card
Card baud rate	26, 106, 212, 424 or 848 kbps
NFC Forum Tag read/write	<ul style="list-style-type: none"> <li>Type 1 : Innovision Jewel/Topaz</li> <li>Type 2 : NXP Mifare UltraLight, NTAG 203...</li> <li>Type 3 : Sony Felica Lite</li> <li>Type 4 : any T=CL smartcard</li> </ul>
Supported contactless smartcards (partial list)	<ul style="list-style-type: none"> <li>NXP Mifare Classic, Mifare Plus, Desfire, SmartMX...</li> <li>Calypto (including Innovatron radio protocol)</li> <li>Infineon SLE66, ST Micro Electronics ST19</li> <li>Atmel AT88 and CryptoRF</li> <li>ST Micro Electronics SR, SRI, SRIX</li> <li>ASK CTS256B and CTS512B</li> <li>Any NFC object or mobile phone running in card emulation mode</li> </ul>
Supported RFID tags and labels (partial list)	<ul style="list-style-type: none"> <li>NXP ICODE-SLI,</li> <li>Texas Instrument TagIT</li> <li>ST Micro Electronics LRI and MLR</li> </ul>


ISO 7816 smartcard interfaces	
Out-of-the-box support for 1 ID-000 mini SIM/SAM slot Support for 1 ID-1 smartcard and 4 ID-000 mini SIM/SAM through Inside Secure AT83C26 smartcard multiplexer (see doc. PNA2236 for details)	
Standards	ISO/IEC 7816 (3 and 4) Supporting both T=0 and T=1 protocols
Smartcard class	5V, 3V or 1.8V cards supported (classes A, AB, ABC)
Card clock	4MHz
Card baud rate	Up to 115200 bps

USB PC /SC interface	
Standard	USB 2.0 full speed (12Mbps) Standard USB CCID profile
Power supply	Powered by USB 5V DC +/- 10%, 150mA typ. , 500mA max
Windows driver	2000/XP/Vista/Seven
Linux, *nix driver	Supported by PCSC-lite open source stack on Linux and other Unix systems
API and SDK	100% PS/SC compliant - Free SDK

Environment and safety	
Operating temperature	- 20 → + 70°C
Storage temperature	- 40 → + 85°C
MTBF	500 000 hours
CE mark	EN50082 / EN55022 class B
Other standards	RoHS, FCC part 15 pending

### PINOUT AND FOOTPRINT (H663AC)

Please refer to document PNA2236 « H663 AND H663USB HARDWARE GUIDE » for reference and details.

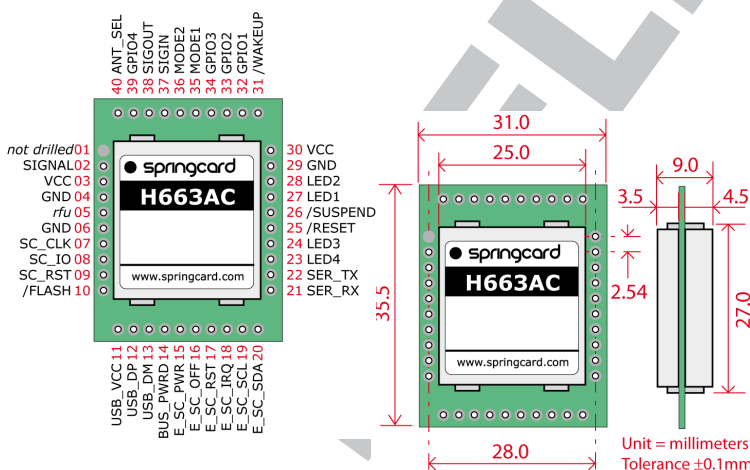

### ORDER CODES

PART #	Description
H663AC	H663 module
H663A	H663 module without ISO 7816
H663USB	Ready-to-use H663 mounted on 65x45 antenna
CMP3062	1.5m USB cable for H663USB

### PRECAUTIONS FOR INSTALLATION

Those devices use inductive coupling (magnetic field) to power the cards and communicate with them. Precaution must be taken to keep them far from any source of perturbation (e.g. other readers, computers...). Installing the device near a metal surface will decrease the operating distance and increase power consumption. Please contact us if you need any assistance to integrate those devices.  
The modules need an external antenna to operate. The antenna must be designed carefully, depending on your own specifications (size constraints, expected operating distance) but with limited flexibility due to the requirements of the ISO standards and the EMC regulations. SpringCard has a long experience designing antenna. Please contact us if you need a custom design.

Information in this document is subject to change without notice.

[www.springcard.com](http://www.springcard.com)

Copyright © PRO ACTIVE SAS 2010-2012, all rights reserved.  
Reproduction without written permission of PRO ACTIVE is forbidden.  
SPRINGCARD, PRO ACTIVE, and both logos are registered trademarks of PRO ACTIVE SAS.  
All other trademarks are property of their respective owners.

PRO ACTIVE company with a capital of 227 000 €  
R.C.S. EVRY B 429 665 482  
N.A.F. 722 C  
VAT # : FR 27 429 665 482  
France

A PRO ACTIVE BRAND

**Pro Active**