

## PROX'N'DRIVE HF/LF

### LOW POWER CONTACTLESS COUPLER

#### 13.56MHZ+125KHZ



Prox'N'Drive is an ISO 14443 (A,B & B') and Mifare contactless reader/writer. This version of the Prox'N'Drive now features the compliance with 125KHz tags such as HiTag tags. Featuring an innovative low power card detection system and designed to be installed behind a windscreen or a window, it is the ideal coupler for car-sharing applications.

#### KEY FEATURES

Being both compact and flexible, Prox'N'Drive is ideal for in-vehicle application. A single cable conveys both single 12V DC power and the RS-232 interface. The front panel shows 3 high-luminosity LEDs for user information. The low power card detection system make it possible to put both the reader and its host system in deep standby mode until a contactless card, RFID tag or NFC object is waved other the antenna. The reader is customizable with your logo.

#### A FEW TYPICAL APPLICATIONS


- Car-sharing
- Battery-powered kiosks
- Active display windows

#### SPRINGCARD & PRO ACTIVE


Established in 2000, **Pro Active** is an innovative provider of smartcard-related solutions, and one of the leaders on the contactless-reader market.

**SpringCard** distributes **Pro Active's** contact and contactless products worldwide, under a single brand name.

#### MECHANICAL CHARACTERISTICS

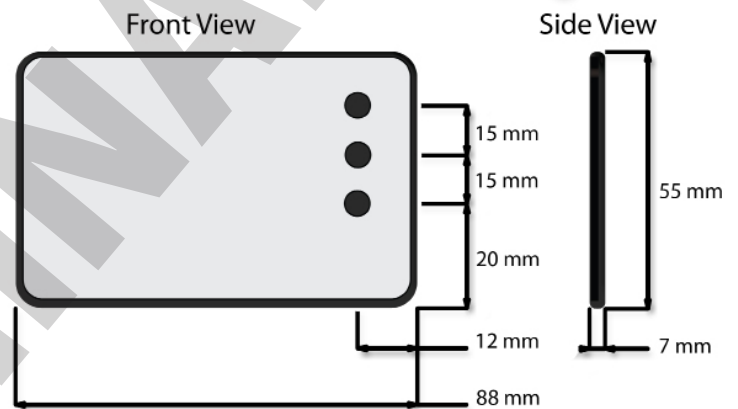

Molex 43025-1000



PIN Assignments

Pin	Assignment
1	HOST_WAKEUP
2	\RESET
3	\FLASH
4	GND
5	RFU
6	PWR
7	RS232 OUT
8	RS232 IN
9	GND
10	RFU

#### HEADQUARTERS, EUROPE SPRINGCARD

13 voie la Cardon  
Parc Gutenberg  
91120 Palaiseau  
FRANCE

Phone : +33 (0) 164 53 20 10  
sales@springcard.com

#### AMERICAS SPRINGCARD

6161 El Cajon Blvd  
Suite B, PMB  
San Diego, CA 92115  
USA

Phone : +1 (619) 544 1450  
sales-usa@springcard.com

[www.springcard.com](http://www.springcard.com)

A PRO ACTIVE BRAND

**Pro Active**

## PROX'N'DRIVE HF/LF

### LOW POWER CONTACTLESS COUPLER

#### 13.56MHZ+125KHZ



## TECHNICAL SPECIFICATIONS

### Contactless smartcard interface

Standards	ISO/IEC 14443 A, B and B'
RFID carrier	13.56 MHz and 125kHz
Operating distance	up to 8 cm depending on card and on environment
Card baud rate	106 kbps
Supported cards (partial list) :	<ul style="list-style-type: none"> <li>▪ NXP (Philips) MIFARE Classic &amp; UltraLight</li> <li>▪ NXP (Philips) DESFIRE, SmartMX, ProX</li> <li>▪ Calypso (CD97, CD21, GTML, etc)</li> <li>▪ HiTag (125kHz)</li> <li>▪ NXP Hitag 1 &amp; Hitag 2 (125kHz)</li> </ul>
And virtually any ISO/IEC 14443 A or B compliant smartcard	

### Hardware specifications

Dimensions (LxWxH)	88 x 55 x 7 mm
Housing material	ABS - 94VO
Weight	75 g
Cable	100 cm
Connector	Molex 43025-1000

### Environment and safety

Operating temperature	-25°C → +85°C
Storage temperature	<i>to be determined</i>
MTBF	500 000 hours
CE mark	EN50082 / EN55022 class B
Other standards	RoHS, FCC pending

### Serial Interface

Connector	RS-232
Power supply	3,3V to 24V DC/DC
Baud rate	38400 or 115200 bps

### Software

API and SDK	SpringProx API - Free SDK available API compliant with existing products (CSB4, K531, K632, K663...)
-------------	---



### Self Adhesive foam

color	black
width	0.9mm
temperature	-40°C → +120°C
Resistant to : water, alcool, detergent	

## ORDER CODES

PART #	Description
EX2269	Prox'N'Drive HF/LF

Information in this document is subject to change without notice.

Copyright © PRO ACTIVE SAS 2008-2013, all rights reserved.  
Reproduction without written permission of PRO ACTIVE is forbidden.  
SPRINGCARD, PRO ACTIVE, and both logos are registered trademarks of PRO ACTIVE SAS.  
All other trademarks are property of their respective owners..

PRO ACTIVE company with a capital of 227 000 €  
R.C.S. EVRY B 429 665 482  
N.A.F. 722 C  
VAT # : FR 27 429 665 482  
France

[www.springcard.com](http://www.springcard.com)

A PRO ACTIVE BRAND  
**Pro Active**