


## PROX'N'ROLL USB RFID SCANNER

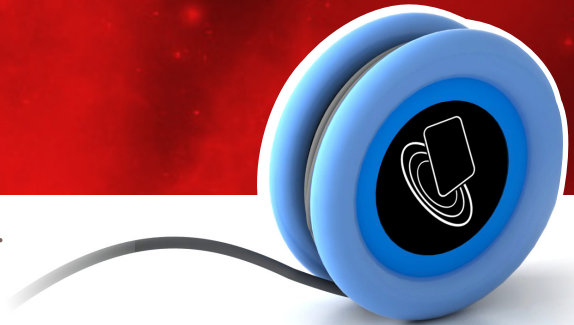

SpringCard Prox'N'Roll is a versatile 13.56MHz RFID scanner. Its USB interface emulates a standard keyboard : no driver installation, no software required !  
Prox'N'Roll RFID scanner is highly configurable to read serial number or data from any RFID tag or contactless smartcards.

### KEY FEATURES

Traditionally, reading data from any RFID tags or contactless smartcard meant developing a PC software to drive the reader step by step.

Prox'N'Roll RFID scanner dramatically changes this paradigm: the reader is « autonomous » and performs all the job on its own. Collected data are then transmitted to the computer as if they were entered on the keyboard.

Thanks to Prox'N'Roll RFID scanner, reading RFID chips is now as easy as reading a barcode.

### EASY CONFIGURATION

Prox'N'Roll RFID scanner is totally configured through a secure master card. The scanner is able to run 4 recognition templates simultaneously.

### A FEW TYPICAL APPLICATIONS

- Loyalty program, user identification and asset tracking,
- Logistics,
- RFID asset management

### SUPPORTED CONTACTLESS SMARTCARDS

Prox'N'Roll is compliant with ISO/IEC 15693 and 14443 (A and B) standards. List of supported chips includes:

- NXP (Philips) : ICODE1, ICODE-SLI, Mifare Classic and UltraLight, Desfire, ProX, SmartMX,
- Texas Instrument : TagIT,
- ST MicroElectronics : SR176, SRiX, etc
- ASK CTS256B and CTS512B,
- HID iClass and Inside PicoTag,
- MultiOS or JavaCard T=CL cards,
- Calypso transportation cards,
- NFC mobile phones or other NFC-capable objects (tag emulation mode)

### SPRINGCARD & PRO ACTIVE

Established in 2000, Pro Active is an innovative provider of contact/contactless smartcard reader/writer/encoder solutions, and a leader on the contactless-reader market.

All Pro Active products are distributed worldwide under the Springcard brand name.

#### HEADQUARTERS, EUROPA SPRINGCARD

13 voie la Cardon  
Parc Gutenberg  
91120 Palaiseau  
FRANCE

Phone : +33 (0) 164 53 20 10  
Fax : +33 (0) 164 53 20 18

#### AMERICAS SPRINGCARD

964 Fifth Avenue  
Suite 235  
San Diego, CA 92101  
USA

Phone : +1 (619) 544 1450  
Fax : +1 (619) 573 6867

[www.springcard.com](http://www.springcard.com)

A PRO ACTIVE BRAND  
**Pro  
Active**

## PROX'N'ROLL USB RFID SCANNER



### TECHNICAL SPECIFICATIONS

Contactless smartcard interface	
Standards	ISO/IEC 14443 A and B, T=CL ISO/IEC 15693 and 18000-3
RFID carrier	13.56 MHz
Operating distance	up to 5 cm depending on card and on environment
Card baud rate	106 kbit/s (14443) 26 kbit/s (15693)
Supported cards (partial list) : <ul style="list-style-type: none"> <li>▪ NXP (Philips) ICODE1, ICODE-SLI, etc</li> <li>▪ Texas Instrument TagIT</li> <li>▪ NXP (Philips) MIFARE Classic &amp; UltraLight</li> <li>▪ NXP (Philips) DESFIRE, SmartMX, ProX</li> <li>▪ Infineon SLE66 family</li> <li>▪ ST MicroElectronics SR, SRI, SRIX families</li> <li>▪ HID iClass, Inside PicoTag</li> <li>▪ ASK CTS256/CTS512</li> <li>▪ Calypso (CD97, CD21, GTML, etc)<sup>1</sup></li> </ul> And virtually any ISO/IEC 14443 A or B compliant smartcard, or ISO/IEC 15693 compliant RFID label	

<sup>1</sup> Calypso card operation is subject to an extra license fee. Contact us for information.

USB interface	
Standard	USB 2.0 full speed (12Mbps) - also supports 1.1
Power supply	Bus powered (≈200mA under 5V)
Profile	USB Human Interface Device (HID) class Seen as an USB keyboard
Keyboard emulation	QWERTY, AZERTY, QWERTZ layouts Characters A to Z and 0 to 9 only
Keyboard behaviour	May «hit» TAB, ENTER, etc before and/or after each scan

Hardware specifications	
Status indicator	3 LEDs (red, blue, green) Buzzer (85 dBA approx.)
Color	Blue wheels or yellow (or other colors?) + black body
Dimensions (LxWxH)	75 x 75 x 25 mm
Housing material	ABS
Weight	≈ 150g
USB cable	≈ 1.80 m

Environment and safety	
Operating temperature	0 → +50°C
Storage temperature	-40 → +85°C
MTBF	500 000 hours
CE mark	EN50082 / EN55022 class B
Other standards	RoHS

### ORDER CODES

PART #	Description
PNRU-16	Prox'N'Roll USB RFID scanner

#### PRECAUTIONS FOR INSTALLATION

This device is a contactless reader; it uses inductive coupling (magnetic field) to power the cards and communicate with them. Precaution must be taken to keep the reader far from any source of perturbation (e.g. other readers, computers, etc). Installing the reader near a metal surface (aluminium or steel plate, etc) will lead to shorter operating distance and increased power consumption. SpringCard has a long experience installing contactless couplers in various kinds of devices. Do not hesitate to contact us if you need any assistance.

Information in this document is subject to change without notice.

Copyright © PRO ACTIVE SAS 2008, all rights reserved.  
 Reproduction without written permission of PRO ACTIVE is forbidden.  
 SPRINGCARD, PRO ACTIVE, and both logos are registered trademarks of PRO ACTIVE SAS.  
 All other trademarks are property of their respective owners.

PRO ACTIVE company with a capital of 227 000 €  
 R.C.S. EVRY B 429 665 482  
 N.A.F. 722 C  
 VAT # : FR 27 429 665 482  
 France

[www.springcard.com](http://www.springcard.com)

A PRO ACTIVE BRAND  
**Pro Active**