



PNA13190-AC
27/08/2014

SPRINGCARD OEM MODULES WITH ANTENNA

Hardware integration guide

DOCUMENT IDENTIFICATION

Category	Integration guide		
Family/Customer	Antennas & Modules		
Reference	PNA13190	Version	AC
Status		Classification	Public
Keywords	K632-TLL, K632-232, K663-TLL, K663-232, H663-TTL, H663-232, H663-USB		
Abstract			

File name	V:\Dossiers\SpringCard\A-Notices\Commun\Modules sur antenne\[PNA13190-AC] OEM Module with antenna Integration guide.odt		
Date saved	27/08/14	Date printed	

REVISION HISTORY

Ver.	Date	Author	Valid. by		Approv. by	Details
			Tech.	Qual.		
AA	09/09/13	JDA				
AB	02/10/13	JDA				Drawings and reference added
AC	26/08/14	JDA				Order codes added

CONTENTS

1. INTRODUCTION.....	6
1.1. ABSTRACT.....	6
1.2. PRODUCT LIST.....	6
1.3. RELATED DOCUMENTS.....	7
1.4. AUDIENCE.....	8
1.5. SUPPORT AND UPDATES.....	8
1.6. PRECAUTIONS FOR INSTALLATION AND USE.....	8
2. MODULE + ANTENNA WITH SERIAL INTERFACE AT TTL LEVEL	9
2.1. PRODUCTS IN THIS GROUP.....	9
2.1.1. K632-TTL, K632/RDR-TTL.....	9
2.1.2. K663-TTL, K663/RDR-TTL.....	9
2.2. MECHANICAL SPECIFICATIONS.....	9
2.3. CONNECTOR AND PINOUT.....	11
2.4. K632-TTL, K632/RDR-TTL – CHARACTERISTICS.....	12
2.5. K663-TTL, K663/RDR-TTL – CHARACTERISTICS.....	13
3. MODULE + ANTENNA WITH SERIAL INTERFACE AT RS-232 LEVEL.....	14
3.1. PRODUCTS IN THIS GROUP.....	14
3.1.1. K632-232, K632/RDR-232.....	14
3.1.2. K663-232, K663/RDR-232.....	14
3.2. MECHANICAL SPECIFICATIONS.....	15
3.3. CONNECTOR AND PINOUT.....	16
3.4. K632-232, K632/RDR-232 – CHARACTERISTICS.....	17
3.5. K663-232, K663/RDR-232 – CHARACTERISTICS.....	19
4. MODULE + ANTENNA WITH USB INTERFACE.....	21
4.1. PRODUCTS IN THIS GROUP.....	21
4.1.1. H663-USB, H663/RDR-USB.....	21
4.1.2. H512-USB.....	21
4.2. MECHANICAL SPECIFICATIONS.....	22
4.3. CONNECTOR AND PINOUT.....	23
4.4. H663-USB, H663/RDR-USB – CHARACTERISTICS.....	24
4.5. H512-USB – CHARACTERISTICS.....	25

1. INTRODUCTION

1.1. ABSTRACT

SpringCard OEM product family is a large family of RFID/NFC readers & writers. This family contains OEM modules with USB (H663, H512) or without (K663, K632). To be operated, these modules shall be coupled to a RFID antenna.

SpringCard offers ready-to-use RFID/NFC readers & writers for OEM by installing its OEM modules on top of a **69 x 45 mm antenna**.

This document is the **hardware manual** for these readers & writers.

1.2. PRODUCT LIST

Product name	Order code	Description
RS-TTL interface		
K632-TTL	SC0305	K632 reader & writer with 69 x 45 antenna, RS-TLL interface
K632/RDR-TTL	not available	K632 standalone reader with 69 x 45 antenna, RS-TLL interface
K663-TTL	SC13137	K663 reader & writer with 69 x 45 antenna, RS-TLL interface
K663/RDR-TTL	SC13118	K663 standalone reader with 69 x 45 antenna, RS-TLL interface
RS-232 interface		
K632-232	SC0199	K632 reader & writer with 69 x 45 antenna, RS-232 interface
K632/RDR-232	SC9517	K632 standalone reader with 69 x 45 antenna, RS-232 interface
K663-232	SC3064	K663 reader & writer with 69 x 45 antenna, RS-232 interface
K663/RDR-232	SC13121	K663 standalone reader with 69 x 45 antenna, RS-232 interface

Product name	Order code	Description
RS-485 interface		
K632-485	not available	K632 reader & writer with 69 x 45 antenna, RS-485 interface
K632/RDR-485	SC9416	K632 standalone reader with 69 x 45 antenna, RS-485 interface
K663-485	SC14180	K663 reader & writer with 69 x 45 antenna, RS-485 interface
K663/RDR-485	SC14181	K663 standalone reader with 69 x 45 antenna, RS-485 interface
USB interface		
H663-USB	SC3016	H663 USB PC/SC coupler with 69 x 45 antenna
H512-USB	SC2235	H512 USB PC/SC coupler feat. card emulation with 69 x 45 antenna
H663/RDR-USB	SC13115	H663 standalone USB reader with 69 x 45 antenna

1.3. RELATED DOCUMENTS

Editor	Doc #	Description
SpringCard	PMD13204	K663 Group – Developer's reference manual
SpringCard	PMD2176	H512 Group – Developer's reference manual
SpringCard	PMD2271	H663 Group – Developer's reference manual
SpringCard	PMD13206	K663/RDR Group – Configuration & Software guide
SpringCard	to be written	H663/RDR Group – Configuration & Software guide

1.4. AUDIENCE

This manual is designed for use by electronic hardware integrators. It assumes that the reader has expert knowledge of digital and analog electronics.

1.5. SUPPORT AND UPDATES

Related documentation (e.g. product datasheets, application notes, sample software, HOWTOs and FAQs...) is available at SpringCard's web site:

www.springcard.com

Updated versions of this document and others are posted on this web site as soon as they are available.

For technical support enquiries, please refer to SpringCard support page, on the web at

www.springcard.com/support

1.6. PRECAUTIONS FOR INSTALLATION AND USE

The products depicted in this document are RFID/NFC couplers. Their antenna generates a magnetic field that creates an inductive coupling to both power and communicate with the card/tag that is present in the field.

Any metallic surface near the reader's antenna distorts the field and is likely to decrease the operating distance and to increase power consumption. It may even prevent any reader operation with all cards/tags or with some of them depending on their characteristics.

Precaution must be taken to keep readers far from any source of perturbation (e.g. other readers, computers...) and far from any metallic housing or shielding, electronics part.

Please refer to document [PMI9C2P: Contactless Readers Installation Requirements](#) for details.

2. MODULE + ANTENNA WITH SERIAL INTERFACE AT TTL LEVEL

2.1. PRODUCTS IN THIS GROUP

2.1.1. K632-TTL, K632/RDR-TTL

SpringCard K632 is a reader/writer module compliant with ISO/IEC 14443 (Proximity) and ISO/IEC 15693 (Vicinity).


- **SpringCard K632-TTL** is this module mounted on **SpringCard's 69 x 45 unbalanced antenna**, featuring serial communication at TTL level (CMOS compatible).
- **SpringCard K632/RDR-TTL** is the same hardware running a “standalone reader” firmware.

2.1.2. K663-TTL, K663/RDR-TTL


SpringCard K663 is a reader/writer module compliant with ISO/IEC 14443 (Proximity), ISO/IEC 15693 (Vicinity) and ISO/IEC 18092 (NFCIP-1).

- **SpringCard K663-TTL** is this module mounted on **SpringCard's 69 x 45 balanced antenna**, featuring serial communication at TTL level (CMOS compatible).
- **SpringCard K663/RDR-TTL** is the same hardware running a “standalone reader” firmware.

2.2. MECHANICAL SPECIFICATIONS

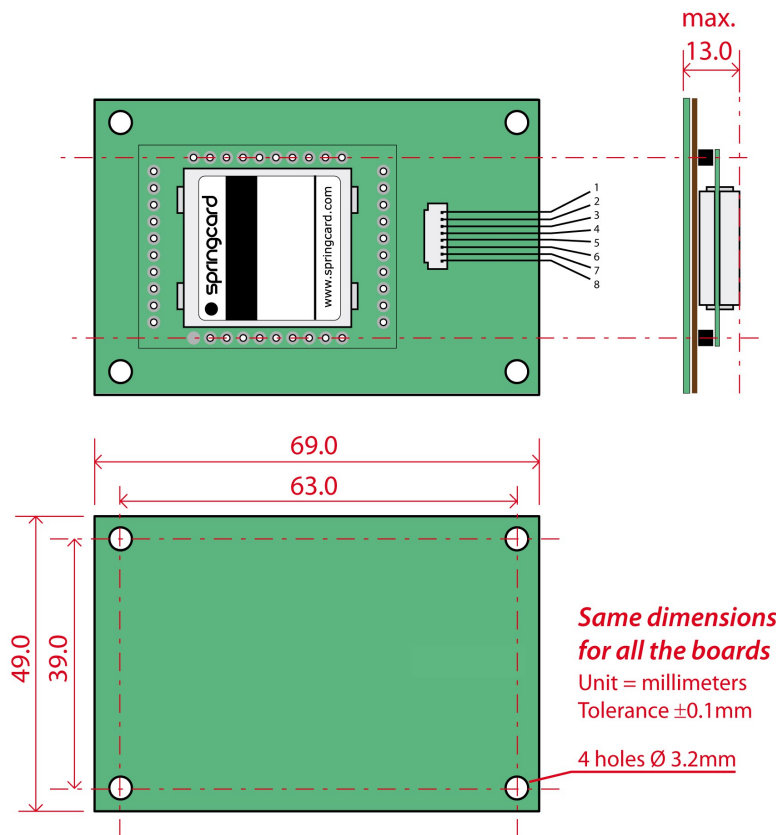

2.3. CONNECTOR AND PINOUT

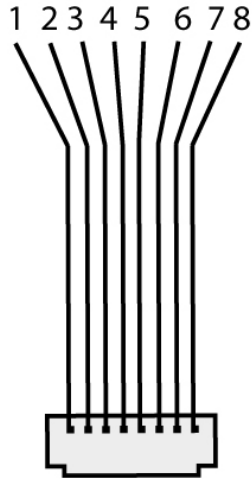

Reference

JST SHR-08V -S -B

Pinout details

PIN	NAME	Type	Description	Remark
1	RFU		Not used	Must be left unconnected
2	/FLASH	IN	Firmware upgrade	Internal pull-up Can be left unconnected
3	GND	Ground	Ground	
4	/RESET	IN	Module reset	Internal pull-up Can be left unconnected
5	VCC	Power	Power supply	
6	RX (TTL)		Serial interface	Host to module
7	TX (TTL)		Serial interface	Module to host
8	GND	Ground	Ground	

2.4. K632-TTL, K632/RDR-TTL – CHARACTERISTICS

Absolute maximum ratings

Stresses beyond those listed under ‘Absolute Maximum Ratings’ may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

SYMBOL	Parameter	Min	Max	Unit
VCC _{ABS}	DC supply voltage with respect to ground	-0.3	6.0	V
V _{IN,ABS}	Voltage to any pin with respect to ground	-0.3	VCC+0.3	V
T _{STORAGE}	Storage temperature	-20	+70	°C

Operating condition range

SYMBOL	Parameter	Condition	Min	Typ	Max	Unit
T _{OPERATION}	Operating temperature		-20	+25	+70	°C
VCC	Supply voltage		3.0	5.0	5.5	V
ICC	Power supply current	Soft power down			6	mA
		RF field OFF		30	35	mA
		RF field ON		150	250	mA

Input pin characteristics

Pins RX, /SUSPEND and /FLASH have TTL input characteristics.

SYMBOL	Parameter	Min	Max	Unit
V _{IL}	LOW-level going threshold		0.8	V
V _{IH}	HIGH-level going threshold	2.0		V
I _{LEAK}	Input leakage current		4	μA

Output pin characteristics

Pin TX has TTL output characteristics.

SYMBOL	Parameter	Min	Max	Unit
V _{OL}	Output LOW-level		0.4	V
V _{OH}	Output HIGH-level	2.4		V
I _o	Output current source or sink		4	mA

2.5. K663-TTL, K663/RDR-TTL – CHARACTERISTICS

Absolute maximum ratings

Stresses beyond those listed under ‘Absolute Maximum Ratings’ may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

SYMBOL	Parameter	Min	Max	Unit
VCC _{ABS}	DC supply voltage with respect to ground	-0.3	6.0	V
V _{IN,ABS}	Voltage to any pin with respect to ground	-0.3	VCC+0.3	V
T _{STORAGE}	Storage temperature	-40	+80	°C

Operating condition range

SYMBOL	Parameter	Condition	Min	Typ	Max	Unit
T _{OPERATION}	Operating temperature		-20	+25	+70	°C
VCC	Supply voltage		3.0	5.0	5.5	V
ICC	Power supply current	Soft power down			6	mA
		RF field OFF		30	35	mA
		RF field ON		150	250	mA

Input pin characteristics

Pins RX, /SUSPEND and /FLASH have TTL input characteristics.

SYMBOL	Parameter	Min	Max	Unit
V _{IL}	LOW-level going threshold		0.8	V
V _{IH}	HIGH-level going threshold	2.0		V
I _{LEAK}	Input leakage current		4	µA

Output pin characteristics

Pin TX has TTL output characteristics.

SYMBOL	Parameter	Min	Max	Unit
V _{OL}	Output LOW-level		0.4	V
V _{OH}	Output HIGH-level	2.4		V
I _o	Output current source or sink		4	mA

3. MODULE + ANTENNA WITH SERIAL INTERFACE AT RS-232 LEVEL

3.1. PRODUCTS IN THIS GROUP

3.1.1. K632-232, K632/RDR-232

SpringCard K632 is a reader/writer module compliant with ISO/IEC 14443 (Proximity) and ISO/IEC 15693 (Vicinity).


- **SpringCard K632-232** is this module mounted on **SpringCard's 69 x 45 unbalanced** antenna, featuring a serial communication link compliant with the RS-232 specification.
- **SpringCard K632/RDR-232** is the same hardware running a “standalone reader” firmware.

3.1.2. K663-232, K663/RDR-232


SpringCard K663 is a reader/writer module compliant with ISO/IEC 14443 (Proximity), ISO/IEC 15693 (Vicinity) and ISO/IEC 18092 (NFCIP-1).

- **SpringCard K663-232** is this module mounted on **SpringCard's 69 x 45 balanced antenna**, featuring a serial communication link compliant with the RS-232 specification.
- **SpringCard K663/RDR-232** is the same hardware running a “standalone reader” firmware.

3.2. MECHANICAL SPECIFICATIONS

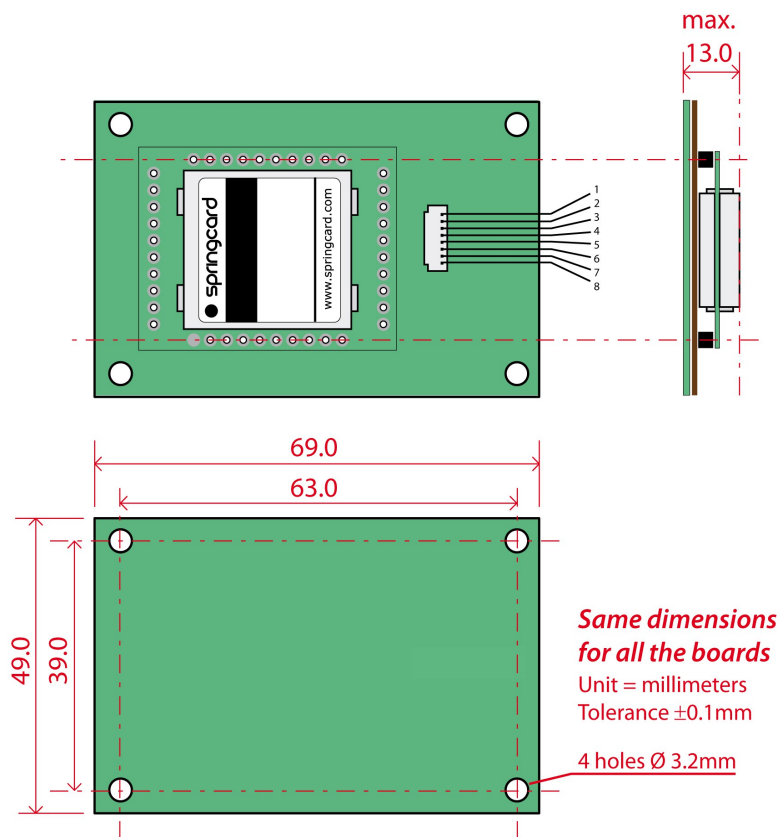

3.3. CONNECTOR AND PINOUT

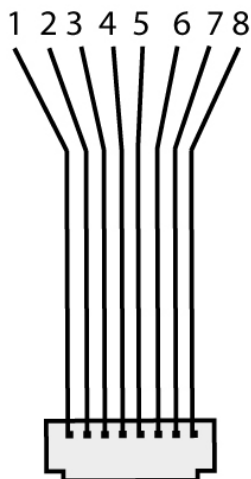

Reference

JST SHR-08V -S -B

Pinout details

PIN	NAME	Type	Description	Remark
1	RFU		Not used	Must be left unconnected
2	/FLASH	IN	Firmware upgrade	Internal pull-up Can be left unconnected
3	GND	Ground	Ground	
4	/RESET	IN	Module reset	Internal pull-up Can be left unconnected
5	VCC	Power	Power supply	
6	RX (RS-232)		Serial interface	Host to module
7	TX (RS-232)		Serial interface	Module to host
8	GND	Ground	Ground	

3.4. K632-232, K632/RDR-232 – CHARACTERISTICS

Absolute maximum ratings

Stresses beyond those listed under ‘Absolute Maximum Ratings’ may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

SYMBOL	Parameter	Min	Max	Unit
VCC _{ABS}	DC supply voltage with respect to ground	-0.3	6.0	V
V _{IN,ABS}	Voltage to any pin with respect to ground	-0.3	VCC+0.3	V
T _{STORAGE}	Storage temperature	-20	+70	°C

Operating condition range

SYMBOL	Parameter	Condition	Min	Typ	Max	Unit
T _{OPERATION}	Operating temperature		-20	+25	+70	°C
VCC	Supply voltage		4.5	5.0	5.5	V
ICC	Power supply current	Soft power down			6	mA
		RF field OFF		30	35	mA
		RF field ON		150	250	mA

Input pin characteristics

Pins /SUSPEND and /FLASH have TTL input characteristics.

SYMBOL	Parameter	Min	Max	Unit
V _{IL}	LOW-level going threshold		0.8	V
V _{IH}	HIGH-level going threshold	2.0		V
I _{LEAK}	Input leakage current		4	µA

RX pin characteristics

Pin RX is a RS-232 input.

SYMBOL	Parameter	Min	Max	Unit
V _{I0}	Logical “0” valid range	3	25	V
V _{I1}	Logical “1” valid range	-25	-3	V
I _{LEAK}	Input leakage current		4	µA

TX pin characteristics

Pin TX is a RS-232 output

SYMBOL	Parameter	Min	Max	Unit
V_{00}	Logical "0" output level	6		V
V_{01}	Logical "1" output level		-6	V
I_o	Output current source or sink		4	mA

3.5. K663-232, K663/RDR-232 – CHARACTERISTICS

Absolute maximum ratings

Stresses beyond those listed under ‘Absolute Maximum Ratings’ may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

SYMBOL	Parameter	Min	Max	Unit
VCC _{ABS}	DC supply voltage with respect to ground	-0.3	6.0	V
V _{IN,ABS}	Voltage to any pin with respect to ground	-0.3	VCC+0.3	V
T _{STORAGE}	Storage temperature	-40	+80	°C

Operating condition range

SYMBOL	Parameter	Condition	Min	Typ	Max	Unit
T _{OPERATION}	Operating temperature		-20	+25	+70	°C
VCC	Supply voltage		3.0	5.0	5.5	V
ICC	Power supply current	Soft power down			6	mA
		RF field OFF		30	35	mA
		RF field ON		150	250	mA

Input pin characteristics

Pins /SUSPEND and /FLASH have TTL input characteristics.

SYMBOL	Parameter	Min	Max	Unit
V _{IL}	LOW-level going threshold		0.8	V
V _{IH}	HIGH-level going threshold	2.0		V
I _{LEAK}	Input leakage current		4	μA

RX pin characteristics

Pin RX is a RS-232 input.

SYMBOL	Parameter	Min	Max	Unit
V _{I0}	Logical “0” valid range	3	25	V
V _{I1}	Logical “1” valid range	-25	-3	V
I _{LEAK}	Input leakage current		4	μA

TX pin characteristics

Pin TX is a RS-232 output

SYMBOL	Parameter	Min	Max	Unit
V_{00}	Logical "0" output level	6		V
V_{01}	Logical "1" output level		-6	V
I_o	Output current source or sink		4	mA

4. MODULE + ANTENNA WITH USB INTERFACE

4.1. PRODUCTS IN THIS GROUP

4.1.1. H663-USB, H663/RDR-USB

SpringCard H663 is a reader/writer module compliant with ISO/IEC 14443 (Proximity), ISO/IEC 15693 (Vicinity) and ISO/IEC 18092 (NFCIP-1).

SpringCard H663 is primarily designed for USB operation in a PC/SC compliant environment. Please refer to document PMD2271 "H663 Developer's Reference Manual" for details. When the module runs the "standalone reader" firmware (H663/RDR), it is also possible to use it as a virtual communication port (USB CDC ACM profile).

- **SpringCard H663-USB** is this module mounted on SpringCard's balanced antenna.
- **SpringCard H663/RDR-USB** is the same hardware running a "standalone reader" firmware.


4.1.2. H512-USB

SpringCard H512 is a reader/writer module + NFC target coupler, compliant with ISO/IEC 14443 (Proximity) and ISO/IEC 18092 (NFCIP-1).


SpringCard H512 is designed for USB operation in a PC/SC compliant environment. Please refer to document PMD2271 "H512 Developer's Reference Manual" for details.

- **SpringCard H512-USB** is this module mounted on SpringCard's balanced antenna.

4.2. MECHANICAL SPECIFICATIONS

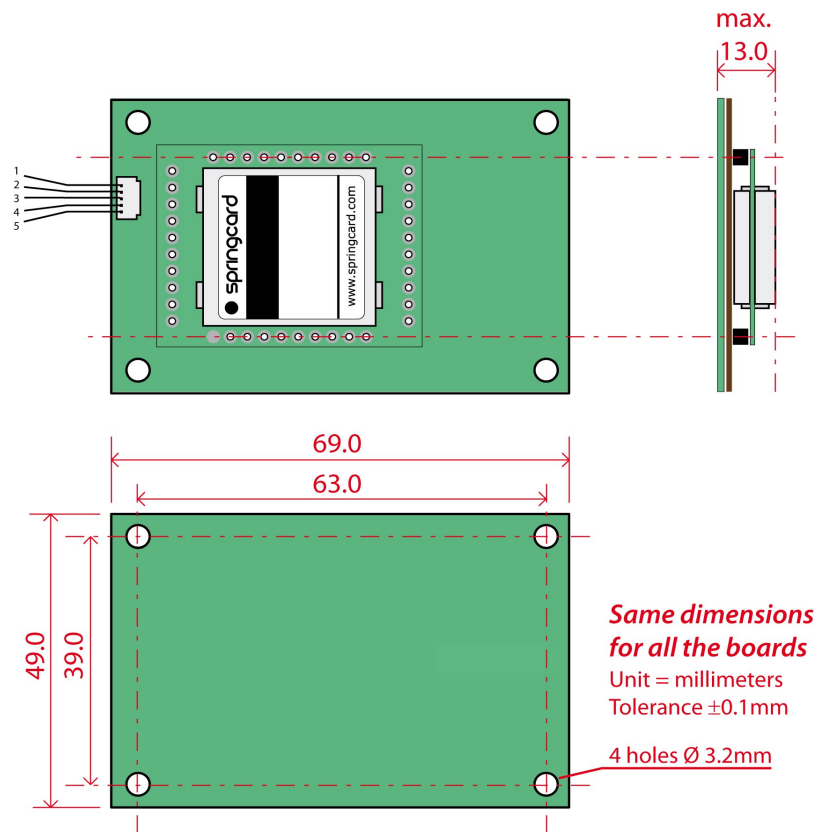

4.3. CONNECTOR AND PINOUT

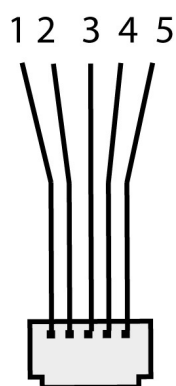

Reference

JST SHR-05V -S -B

Pinout details

PIN	NAME	Type	Description	Remark
1	VCC	Power	Power supply from bus	
2	USB_DM	IN/OUT	USB D-	
3	USB_DP	IN/OUT	USB D+	
4	GND	Ground	Ground wire	
5	GND	Ground	Ground (shielding)	

4.4. H663-USB, H663/RDR-USB – CHARACTERISTICS

Absolute maximum ratings

Stresses beyond those listed under ‘Absolute Maximum Ratings’ may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

SYMBOL	Parameter	Min	Max	Unit
VCC _{ABS}	DC supply voltage with respect to ground	-0.3	6.0	V
V _{IN,ABS}	Voltage to any pin with respect to ground	-0.3	VCC+0.3	V
T _{STORAGE}	Storage temperature	-40	+80	°C

Operating condition range

SYMBOL	Parameter	Condition	Min	Typ	Max	Unit
T _{OPERATION}	Operating temperature		-20	+25	+70	°C
VCC	Supply voltage		4.5	5.0	5.5	V
ICC	Power supply current			150	250	mA

4.5. H512-USB – CHARACTERISTICS

Absolute maximum ratings

Stresses beyond those listed under ‘Absolute Maximum Ratings’ may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

SYMBOL	Parameter	Min	Max	Unit
VCC _{ABS}	DC supply voltage with respect to ground	-0.3	6.0	V
V _{IN,ABS}	Voltage to any pin with respect to ground	-0.3	VCC+0.3	V
T _{STORAGE}	Storage temperature	-40	+80	°C

Operating condition range

SYMBOL	Parameter	Condition	Min	Typ	Max	Unit
T _{OPERATION}	Operating temperature		-20	+25	+70	°C
VCC	Supply voltage		4.5	5.0	5.5	V
ICC	Power supply current			150	250	mA

DISCLAIMER

This document is provided for informational purposes only and shall not be construed as a commercial offer, a license, an advisory, fiduciary or professional relationship between PRO ACTIVE and you. No information provided in this document shall be considered a substitute for your independent investigation.

The information provided in document may be related to products or services that are not available in your country.

This document is provided "as is" and without warranty of any kind to the extent allowed by the applicable law. While PRO ACTIVE will use reasonable efforts to provide reliable information, we don't warrant that this document is free of inaccuracies, errors and/or omissions, or that its content is appropriate for your particular use or up to date. PRO ACTIVE reserves the right to change the information at any time without notice.

PRO ACTIVE doesn't warrant any results derived from the use of the products described in this document. PRO ACTIVE will not be liable for any indirect, consequential or incidental damages, including but not limited to lost profits or revenues, business interruption, loss of data arising out of or in connection with the use, inability to use or reliance on any product (either hardware or software) described in this document.

These products are not designed for use in life support appliances, devices, or systems where malfunction of these product may result in personal injury. PRO ACTIVE customers using or selling these products for use in such applications do so on their own risk and agree to fully indemnify PRO ACTIVE for any damages resulting from such improper use or sale.

COPYRIGHT NOTICE

All information in this document is either public information or is the intellectual property of PRO ACTIVE and/or its suppliers or partners.

You are free to view and print this document for your own use only. Those rights granted to you constitute a license and not a transfer of title : you may not remove this copyright notice nor the proprietary notices contained in this documents, and you are not allowed to publish or reproduce this document, either on the web or by any mean, without written permission of PRO ACTIVE.

Copyright © PRO ACTIVE SAS 2014, all rights reserved.

EDITOR'S INFORMATION

PRO ACTIVE SAS company with a capital of 227 000 €

RCS EVRY B 429 665 482

Parc Gutenberg, 13 voie La Cardon

91120 Palaiseau – FRANCE

CONTACT INFORMATION

For more information and to locate our sales office or distributor in your country or area, please visit

www.springcard.com