


CRAZYWRITER

OEM CONTACTLESS SMARTCARD READER + 2 μ SIM/SAM

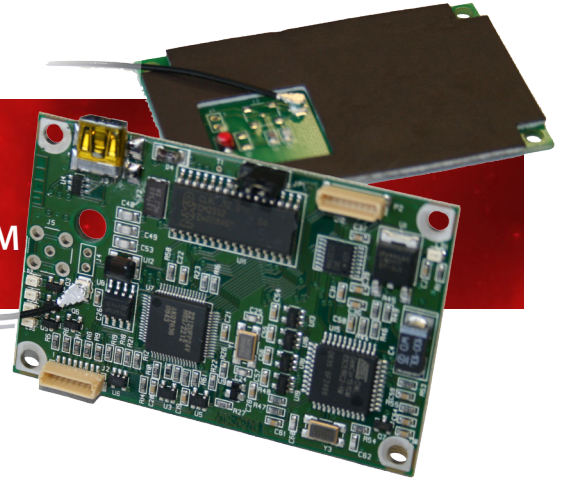

SpringCard CrazyWriter is a versatile 13.56MHz contactless reader and encoder for PC. Its two integrated μ SIM/SAM couplers are ready to receive any SAM smartcard for advanced security.

KEY FEATURES

With a compact design and single bus-powered USB interface, CrazyWriter fits easily into card printers, vending or ticketing machines, fare gates or validators in transportation networks, and more.

PC/SC SMARTCARD READERS

SpringCard CrazyWriter is PC/SC compliant, and it brings immediate contactless card support to existing PC/SC applications (the whole product is seen as 3 PC/SC readers : 1 contactless, and 2 SIM/SAM).

On the other hand, CrazyWriter may be configured for legacy, and is in this case 100% compatible with earlier products from SpringCard (CSB4, K531...).

A FEW TYPICAL APPLICATIONS


- Card pre-personalization and personalization
- Vending or ticketing machines

SPRINGCARD & PRO ACTIVE

Established in 2000, Pro Active is an innovative provider of smartcard-related solutions, and one of the leaders in the contactless-reader market.

SpringCard distributes Pro Active's contact and contactless products worldwide, under a single brand name.

MECHANICAL SPECIFICATIONS

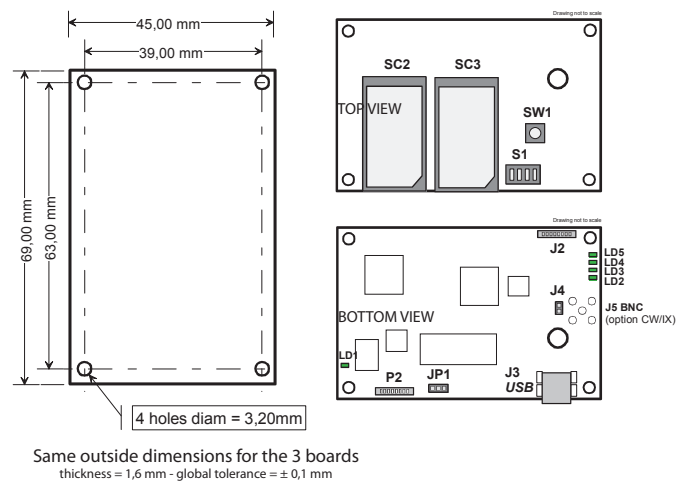

HEADQUARTERS, EUROPE
SPRINGCARD

13 voie la Cardon
Parc Gutenberg
91120 Palaiseau
FRANCE

Phone : +33 (0) 164 53 20 10
sales@springcard.com

AMERICAS
SPRINGCARD

6161 El Cajon Blvd,
Suite B, PMB 437,
San Diego, CA 92115
USA

Phone : +1 (713) 261 6746
sales-usa@springcard.com


www.springcard.com

A PRO ACTIVE BRAND

Pro Active

CRAZYWRITER

OEM CONTACTLESS SMARTCARD READER + 2 µSIM/SAM

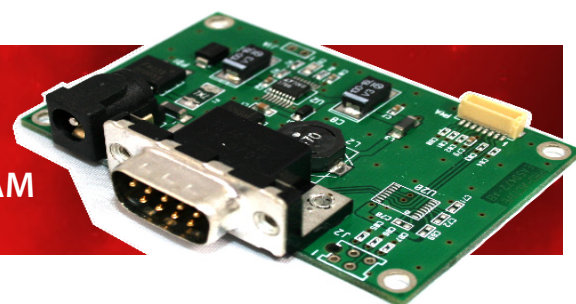

TECHNICAL SPECIFICATIONS

Contactless smartcard interface	
Standards	ISO/IEC 14443 A and B, T=CL ISO/IEC 15693 and 18000-3
RFID carrier	13.56 MHz
Operating distance	up to 8 cm depending on card and on environment
Card baud rate	106, 212, 424 or 848 kbps
Supported cards (partial list) :	
<ul style="list-style-type: none"> NXP (Philips) ICODE1, ICODE-SLI, etc Texas Instrument TagIT NXP (Philips) MIFARE Classic & UltraLight NXP (Philips) DESFIRE, SmartMX, ProX Infineon SLE66 family ST MicroElectronics SR, SRI, SRIX families HID iClass, Inside PicoTag ASK CTS256/CTS512 Calypso (CD97, CD21, GTML, etc)¹ 	
And virtually any ISO/IEC 14443 A or B compliant smartcard, or ISO/IEC 15693 compliant RFID label	

¹ Calypso card operation is subject to an extra license fee. Contact us for information.

SIM / SAM interfaces	
Card format	ID-000 (µSIM)
Number of slots	2
Standards	ISO/IEC 7816, T=0 & T=1
Smartcard class	A and A/B (5V or 3.3V cards)
Clock frequency	3,6864 MHz
Card baud rate	Up to 115200 bps

USB interface	
Standard	USB 2.0 (12Mbps) - also supports 1.1
Power supply	Bus powered (≈300mA under 5V)
Default configuration is PC/SC	

PC /CS mode	
Standard USB CCID profile	
Windows driver	2000/XP/Vista
Linux and others	Supported by pcsc-lite CCID driver
API and SDK	Full PS/SC - Free SDK available

Serial Interface	
Connector	JST: BM08B-SRSS-TB(LF)(SN)
Power supply	5V +/- 10%.
Baud rate	38400 bps
Legacy Mode only	

Legacy mode	
USB virtual serial comm. port API compliant with existing products (SpringProx-CF, CSB4, CSB5, K531,...)	
Drivers	Windows, Linux, ...
API and SDK	SpringProx API - Free SDK available

Optional board - serial Interface (CW-RS)	
Standard	RS-232 (DB9 female connector)
Power supply	9 to 12V DC - 500mA min.
Baud rate	38400 bps
Legacy Mode only	

Hardware specifications	
N.B. : This is an OEM product, sold as electronic parts, without housing	
Dimensions (LxWxH)	Each board = 69 x 45 x 1,6 mm
Max. distance antenna to mother board	2-wire twisted cable = 5 cm 50 Ω coaxial cable = 2 m

Environment and safety	
Operating temperature	0 → +70°C
Storage temperature	-40 → +85°C
Humidity	5 → 95 % (noncondensing)
Durability	10 000 SIM/SAM insertions
MTBF	500 000 hours
CE mark	EN50082 / EN55022 class B
Other standards	RoHS, FCC pending

ORDER CODES

PART #	Description
CW40	CrazyWriter USB cable not provided / Serial cable in option
CWRS	RS232 interface for CrazyWriter Power supply not provided

Information in this document is subject to change without notice.

Copyright © PRO ACTIVE SAS 2008, all rights reserved.
Reproduction without written permission of PRO ACTIVE is forbidden.
SPRINGCARD, PRO ACTIVE, and both logos are registered trademarks of PRO ACTIVE SAS.
All other trademarks are property of their respective owners.

PRO ACTIVE company with a capital of 227 000 €
R.C.S. EVRY B 429 665 482
N.A.F. 722 C
VAT # : FR 27 429 665 482
France

www.springcard.com

PRECAUTIONS FOR INSTALLATION

This device is a contactless reader; it uses inductive coupling (magnetic field) to power the cards and communicate with them. Precaution must be taken to keep the reader far from any source of perturbation (e.g. other readers, computers...). Installing the reader near a metal surface (aluminium or steel plate...) will lead to shorter operating distance and increased power consumption. SpringCard has a long experience installing contactless couplers in various kind of devices. Do not hesitate to contact us if you need any assistance.

A PRO ACTIVE BRAND
Pro Active