

K632-232

OEM CONTACTLESS READER/WRITER MODULE WITH ANTENNA AND RS232 INTERFACE

Ready-to-use ISO/IEC 14443-A/B and ISO/IEC 15693 reader / writer with antenna and RS-232 serial interface that can be embedded in virtually any kind of appliance

KEY FEATURES

K632-232 is dedicated to integrators who need to work with any ISO 14443-A/B or ISO 15693 cards/tags such as Mifare, DESFire, Calypso, ICODE and more.

Thanks to its asynchronous serial communication interface, K632-232 is really easy to operate from any microcontroller or host computer.


K632-232 has many features that make it the only product on the market to provide such flexibility at low cost.

- Metallic bonnets to protect from radiations
- Ferrite on antenna to protect other components from radiations
- Embedded T=CL protocol, ISO/IEC 14443 A & B (from layer 1 to 4) and ISO 15693 compliance. Able to read/write all files/sectors of Mifare, DESFire,...
- High level function set
- High speed communication

A FEW TYPICAL APPLICATIONS

- vending machine,
- card printer,
- access control gate
- enrollement station,
- and more

DETAILED VIEWS

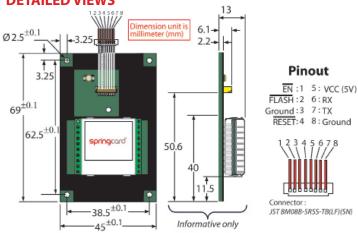

PIN Assignements		Notes
1	/EN - Not used	Must be left unconnected
2	/FLASH - 5V : normal operation 0V : firmware upgrade	Can be left unconnected
3	Ground	
4	/RESET - 5V : normal operation 0V : module reset	Can be left unconntected
5	VCC (5V)	
6	RX (RS-232)	Host to module
7	TX (RS-232)	Module to host
8	Ground	

SPRINGCARD & PRO ACTIVE

Established in 2000, **Pro Active** is an innovative provider of smartcard-related solutions, and one of the leaders on the contactless-reader market.

SpringCard distributes **Pro Active**'s contact and contactless products worldwide, under a single brand name.

HEADQUARTERS, EUROPESPRINGCARD

13 voie la Cardon Parc Gutenberg 91120 Palaiseau FRANCE

Phone: +33 (0)1 64 53 20 10 sales@springcard.com

Americas SPRINGCARD

6161 El Cajon Blvd Suite B, PMB 437 San Diego, CA 92115

Phone: +1 (713) 261 6746 sales-usa@springcard.com

www.springcard.com





K632-232

OEM CONTACTLESS READER/WRITER MODULE WITH ANTENNA AND RS232 INTERFACE



TECHNICAL SPECIFICATIONS

K632 Contactless smartcard interface		
Standards	ISO/IEC 14443 A and B, T=CL ISO/IEC 15693 and 18000-3	
RFID carrier	13.56 MHz	
Operating distance	typical 5 cm - up to 8cm depending on card and antenna	
Card baud rate	106, 212, 424 or 848 kbit/s depending on antenna	

Supported cards (partial list):

- NXP (Philips) ICODE1, ICODE-SLI, etc
- Texas Instrument TagIT
- NXP (Philips) MIFARE Classic & UltraLight
- NXP (Philips) DESFIRE, SmartMX, ProX
- Infineon SLE66 family
- ST MicroElectronics SR, SRI, SRIX families
- HID iClass, Inside PicoTag
- ASK CTS256/CTS512
- Calypso (CD97, CD21, GTML, etc)¹

And virtually any ISO/IEC 14443 A or B compliant smartcard, or ISO/IEC 15693 compliant RFID label

	Serial Interface	
RX/TX pins (RS232)	asynchronous serial communication 8 data bits, 1 stop, no flow control 9600, 38400 or 115200bps	
Power supply	5 V DC	
Consumption	200mA typical	
Connector	JST: BM08B-SRSS-TB(LF)(SN) Corresponding female connector (not provided): JST: SHR-08V -S -B	

Hardware specifications		
Dimensions (LxWxH)	45 x 69 x 15 mm	
Weight	≈ 14g	
Housing	Metalic bonnets on K632 Ferrite shield on antenna	

Environment and safety		
Operating temperature	-20→+70°C	
Storage temperature	-40 →+85°C	
MTBF	500 000 hours	
CE mark	EN50082 / EN55022 class B ¹	
FCC	Part 15	
Other standards	RoHS	

¹Safety: EN60950: 2001 ; EN 50364 : 2001, EMC:EN 301 489-03 v1.4.1 ; EN 301 489-01 v1.6.1.

ORDER CODES

PART #	Description
K632-232	ISO 14443-A/B and ISO 15693 OEM module with
	antenna and RS232 interface

Information in this document is subject to change without notice.

Copyright © PRO ACTIVE SAS 2008, all rights reserved.
Reproduction without written permission of PRO ACTIVE is forbidden.
SPRINGCARD, PRO ACTIVE, and both logos are registered trademarks of PRO ACTIVE SAS.
All other trademarks are property of their respective owners.

PRO ACTIVE company with a capital of 227 000 € R.C.S. EVRY B 429 665 482 N.A.F. 722 C VAT #: FR 27 429 665 482 France



