




OEM MIFARE WALL MOUNTED DEVICE

pfta061-ba.doc
28/11/2005
Version : BA

DETAILED VIEWS

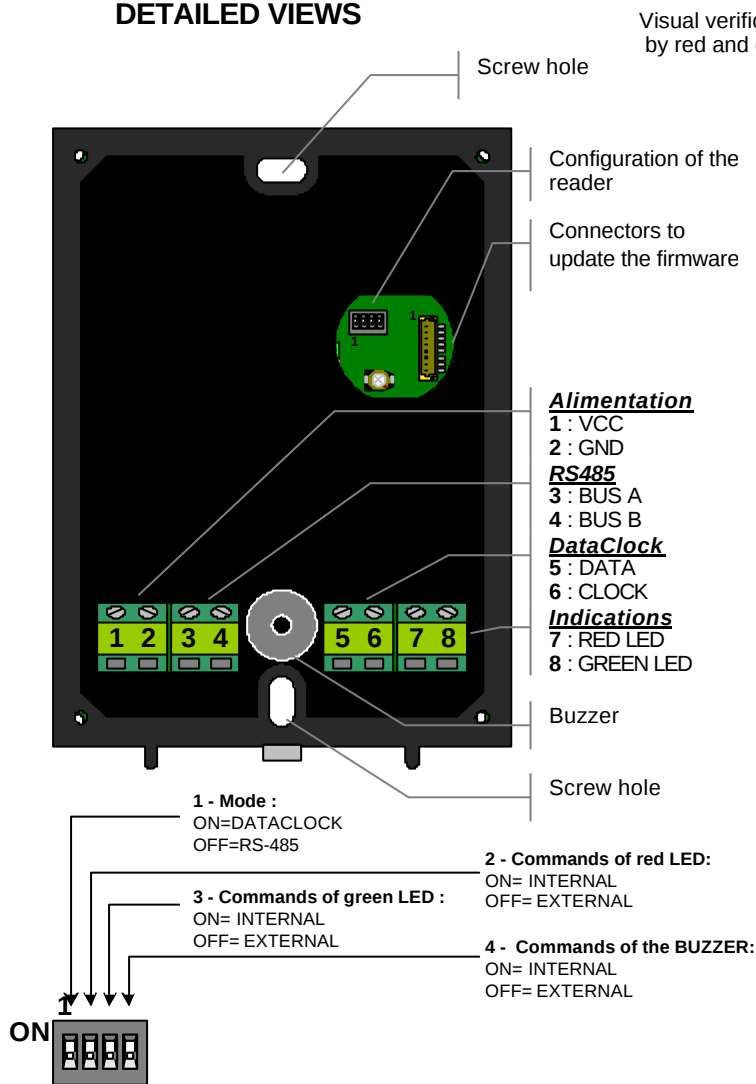

BACK VIEW

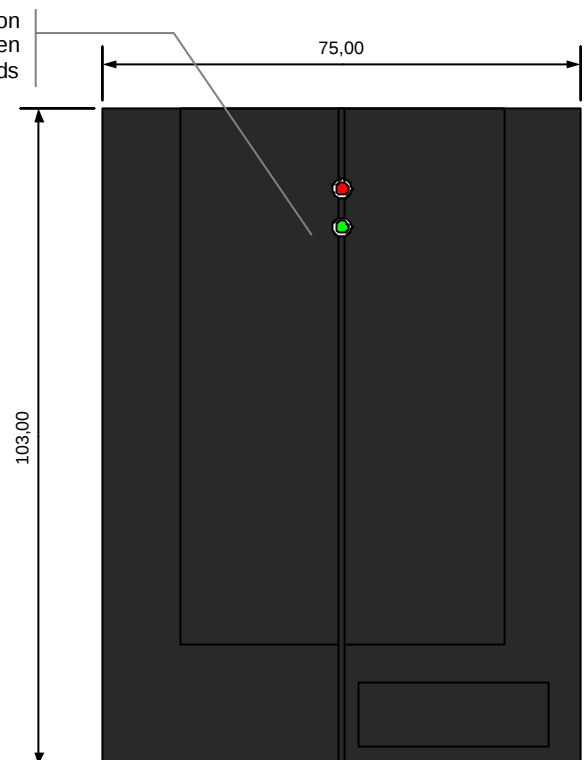

FRONT VIEW

SPECIFICATIONS

Description.....ISO14443-A/B reader on bus RS485 / DATALOCK

Installation.....to be fixed on wall

Power supply12VDC, linear supply recommended

Current requirements (Avg/Peak).....80/250mA @ 12VDC

Operating temperature0°C → +45°C

Transmit frequency ...13.56 MHz

ISO compliance.....ISO14443-A / B

complianceMIFARE® Classic
MIFARE® UltraLight
MIFARE® Pro / ProX
MIFARE® DESFire

Bus.....RS485 or DATALOCK

Indication.....By red/green leds

Connectors block.....2 x connectors block with 4 screws.
Fixation 1 on the left
1 : VCC 2 : GND
3 : BUS A 4 : BUS B
5 : DATA 6 : CLOCK
7 : RED LED 8 : GREEN LED

Data rates.....38400 bauds or 115200 bps
(8 bits, 1 stop, no parity, no flow control, other baudrates available on request)

Firmware.....Downloadable / Upgradable

CertificationsCE Mark: EN50082/EN55022 class B

HousingABS-94HB

Color FinishBlack

Dimensionsh :104mm, l : 75, d :23mm

Weight.....180g

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of PRO ACTIVE. PRO ACTIVE and the PRO ACTIVE logo are registered trademarks of PRO ACTIVE SAS. MIFARE, DESFire and Philips are trademarks of Philips.

TECHNICAL DATASHEET : PRO-MFWM

1/1



Pro Active
Parc Gutenberg
13 VOIE LA CARDON
91120 PALAISEAU
France

Phone : +33 1 64 53 20 10
Fax : +33 1 64 53 20 18
e.mail : info@pro-active.fr
website : www.pro-active.fr

S.A.S. with capital of 227 000 €
R.C.S. EVRY B 429 665 482
A.P.E. 722Z
VAT id : FR27 429 665 482 00015