


DETAILED VIEWS

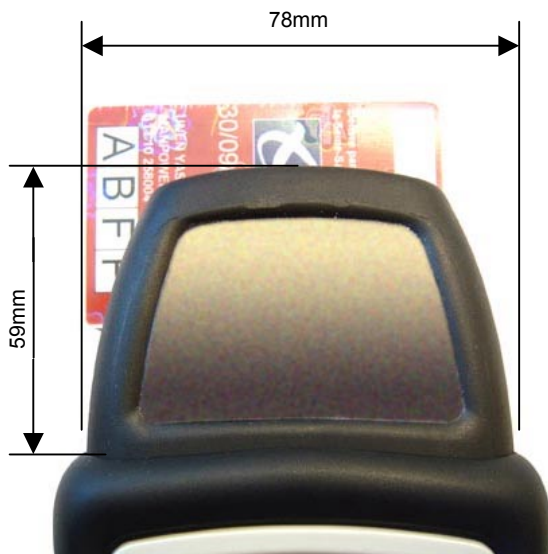

SPECIFICATIONS

Designation.....The SpringProx-RC is a contactless reader usable in the TDS® Recon™ rugged handheld computer.

Range0cm → 2cm (depends on card type)

Power supply Powered by the PocketPC

Consumption Inactive sensor : 130mA max.
Stand-by : 2mA max.

Temperature range +0°C to +45°C

Processor Powered by an ARM9™ family CPU core

Chipset Philips MF RC531

Installation Plug the module in the handheld Compact-Flash® port with the Extended CF-Cap to the TDS® Recon™. Plug and play detection as a serial port under the Microsoft® Windows® CE operating system (PocketPC 2000, 2002, 2003)

Implementation In progress.

Conformity Normes CE : EN50082/EN55022 classe B

ISO compliance ISO 14443-A / ISO 14443-B

Cards supported MIFARE® Standard, UltraLight, Pro/ProX, DESFire

Dimensions w : 78mm, h : 59mm, t : 34mm

Weight 90g

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of PRO ACTIVE. PRO ACTIVE, Smarty logo SpringBio, SpringBio-CF are either registered trademarks or trademarks of PRO ACTIVE France. MIFARE is a registered trademark of Philips Electronics N.V. CompactFlash is a registered trademark of CompactFlash Association. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corp. in the USA and other countries. TDS, Tripod Data System, Recon are registered trademarks or trademarks or common law marks of TDS in the United States.

DATASHEET SPRINGPROX-RC



Pro Active
Parc Gutenberg
13 VOIE LA CARDON
F-91120 PALAISEAU
France

Phone : +33 1 64 53 20 10
Fax : +33 1 64 53 20 18

mail : info@pro-active.fr
web : www.pro-active.fr

S.A.S. capital of 150 000 €
R.C.S. EVRY B 429 665 482
A.P.E. 722Z
VA.T. # FR27 429 665 482 00015